

ROLLON®
BY TIMKEN

X-Rail

Roller guide in embossed sheet metal rails



HA-CO has been Rollon's official distribution partner for decades and is therefore your competent partner in the field of linear technology. We have standard products in stock and special solutions to suit your application are realized in our production - flexible - fast - HA-CO

Product explanation



- > **X-Rail: linear bearings in stainless steel, zinc-plated steel or hardened steel with Rollon-Nox process.**



Fig. 1

X-Rail is the product family of roller embossed guide rails for applications in which an economical price to performance ratio and high corrosion resistance are required.

X-Rail linear guides features a rolled C-profile (0 degrees of axial play) or U-profile (1 degree of axial play) and are available in three versions: stainless steel (PFE/PLE), zinc-plated steel (PFS/PLS) or hardened with Rollon-Nox patented process (PFN/PLN).

Sizes range from 20 to 45 mm depending on the material of the guide and the type of profile. Every option features dedicated sliders, with compact or solid body.

The most important characteristics:

- Corrosion resistant, FDA/USDA compliant materials
- Compensates for deviations in mounting structure parallelism
- Optimal reliability in dirty environments thanks to internal raceways
- Wide range of operating temperature
- Easy adjustment of sliders

Preferred areas of application of the X-Rail product family:

- Construction and machine technology (e.g., safety doors, washing bay accessories)
- Medical technology (e.g., hospital accessories, medical equipment)
- Transport (e.g., rail transport, naval, automotive industry)
- Food and beverage industry (e.g., packaging, food processing)
- Building technology
- Energy technology (e.g., industrial furnaces, boilers)

PFE/PLE (Rollon TEX/UEX) series

PFE/PLE linear guides, with their MFE, KFE, MLE sliders and rollers, are made of stainless steel. They offer a simple and practical solution for all applications where high corrosion resistance is required, in particular for food industry, chemical, pharmaceutical and medical industries.

For applications in severe marine environments is proposed the version with all parts electro polished (X-version) for extra high corrosion resistances. The product is easily washable for applications subject to frequent cleaning.



Fig. 2

PFS/PLS (Rollon TES/UES) series

PFS/PLS linear guides with their KFS/MFS/MLS sliders are made of zinc-plated. They offer a simple and economical solution for a wide range applications, where high frequency is not required.

The compact overall dimensions the internal protected raceways, the ease of assembly and the good ratio of load capacity /size make this product a winning choice compared to other self-built or available solutions on the market.



Fig. 3

PFN/PLN (Rollon TEN/UEN) series

PFN/PLN linear guides, with their KFN/KFP sliders, are made of hardened steel. The Rollon-Nox hardening process provides the guide long life and resistance to wear, in addition to a black surface resistant to flame and abrasion.

Additional treatments are available for applications where an higher resistance to corrosion or a particular attention to design are required (see p. XR-19).



Fig. 4

System (F+L-System)

The F guide with shaped raceways (fixed rail) is used for the main load bearing in radial and axial forces. The L guide with flat raceways (compensating rail) is used for load bearing of radial forces and, in combination with fixed bearing rail, as support bearings for occurring moment loads. A pair of F and L-rail used together offers compensation for deviations in parallelism and tolerances in the mounting structure.



Fig. 5

Rollers

Concentric and eccentric radial ball bearings made of stainless or roller bearing steel are available for each slider. Roller sealing is dependent on the material: 2RS rubber seals or ZZ steel shields. All rollers are lubricated for life.



Fig. 6

Technical data

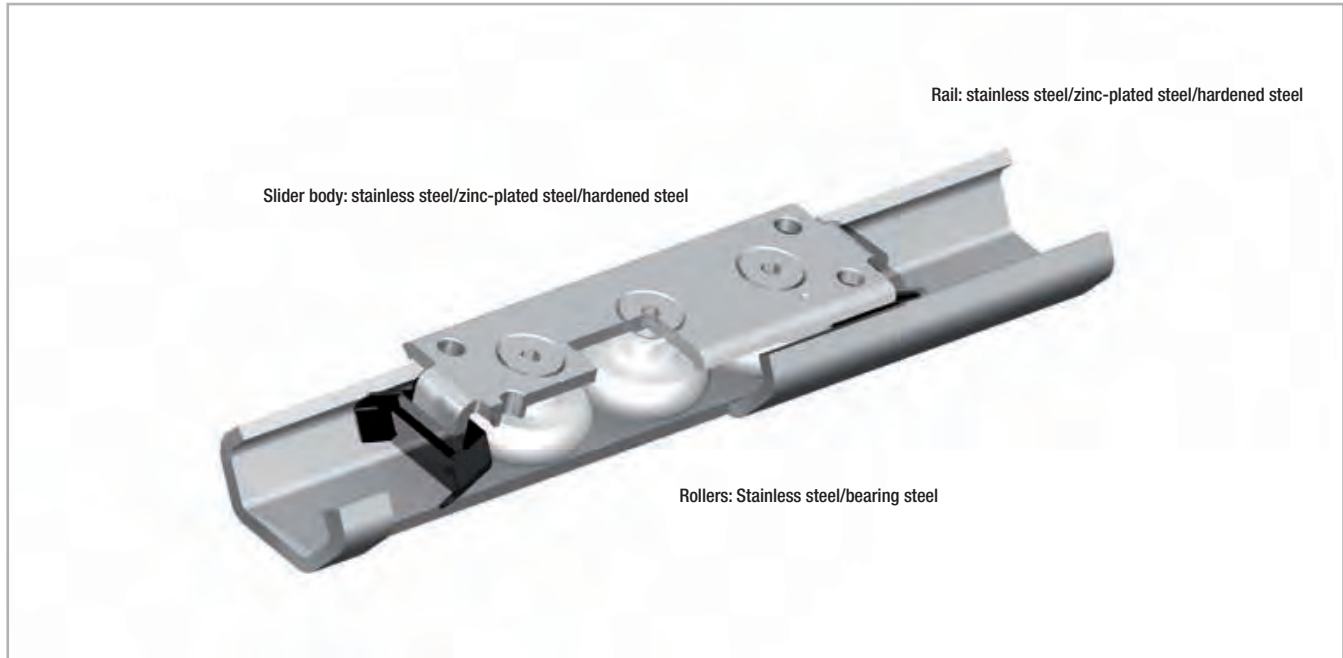


Fig. 7

Performance characteristics:

- Available sizes: 20-26-30-40-45 (depending on type of the guide)
- Max. slider operating speeds in the linear bearing rails:
1.5 m/s (59 in/s) (depending on application)
- Max. acceleration: 2 m/s² (78 in/s²) (depending on application)
- Max. radial load capacity: 1740 N for PFE/PLE series and PFS/PLS series; 3240 N for PFN/PLN series hardened with Rollon-Nox patented process.
- Operating temperature range: PFE/PLE series from -20 °C to +100°C (-4 °F to +212 °F); PFS/PLS series from -20 °C to +120 °C (-22 °F to +248 °F), PFN/PLN series from -20 °C to +120 °C (-22 °F to +338 °F).
- Available rail lengths: from 160 mm to 4000 mm (from 6,3 in to 157 in) in 80 mm increments (3,15 in).
- Rollers lubricated for life
- Roller seal/shield:
KFE/MFE... Sliders => 2RS (splashproof seal),
KFS/MFS... Sliders => 2Z (dust cover seal)
KFN... Sliders => 2Z (dust cover seal)
- Material: PFE/PLE series in stainless steel 1.4404 (AISI 316L), PFS/PLS series in zinc-plated steel ISO 2081, TEN/UEN series in hardened steel with Rollon-Nox patented process.
- Rollers material: carbon steel for PFS/PLS series and PFN/PLN series, stainless steel AISI440 for PFE/PLE series.

Remarks:

- The sliders are equipped with rollers that are in alternating contact with both sides of the raceway. Markings on the body around the outer roller pins indicate the correct arrangement of the rollers to the external load.
Important note: Both outside rollers carry the radial load.
- With a simple adjustment of the eccentric roller, clearance or the desired preload can be set on the rail and slider.
- Sliders of Version 1 (with compact body) come standard with plastic wipers for cleaning the raceways.
- Wipers are available on request for sliders Version 2, 3, 4, 5 and 6 (please check availability for different sizes).
- Different sliders are available depending on the type and the size of the linear guide. Refer to every chapter for details.
- We do not recommend combining (stringing together) the rails.
- Recommended fixing screws: ISO 7380 with low head height (special TORX® screws are available on request).
- Do not use in applications with high number of cycles. For further information, please contact Rollon Technical Department.
- Sliders with wipers for PFN/PLN

> Load capacities

Fixed bearings PFE, PFS, PFN (Rollon TEX, TES, TEN)

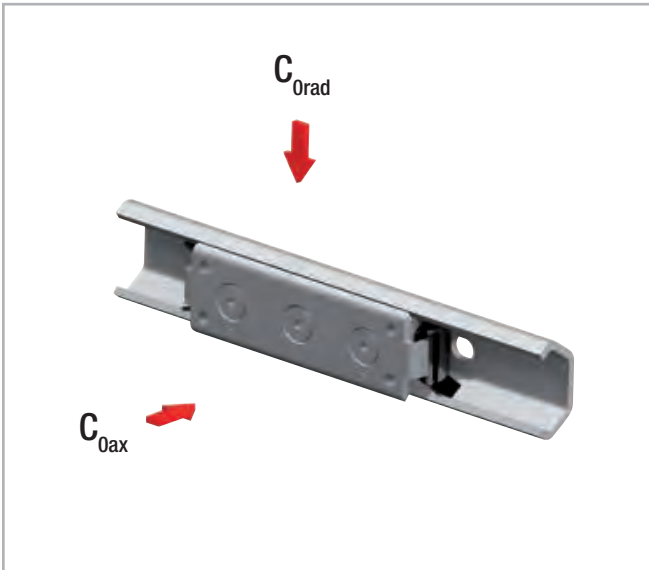


Fig. 8

Rail type	Configuration	C_{Orad} [N]	C_{Oax} [N]
PFE	PFE-20 – KFE20	300	170
	PFE-26 – KFE-26	800	400
	PFE-30 – KFE30	800	400
	PFE-40 – KFE-40	1600	800
	PFE-45 – KFE45	1600	860
PFS	PFS-20 – KFS20	326	185
	PFS-26 – KFS-26	800	400
	PFS-30 – KFS30	870	435
	PFS-40 – KFS-40	1600	800
	PFS-45 – KFS45	1740	935
PFN / PFP	PFN-26 - KFN26-92	1120	380
	PFN-26 - KFN26-142	1520	540
	PFP-30 - KFN30-92	1200	420
	PFP-30 - KFN30-142	1620	580
	PFN-40 - KFN40-135	2400	820
	PFN-40 - KFN40-195	3240	1150

Resulting moment loads must be absorbed through the use of two sliders

Tab. 1

Compensating bearings PLE, PLS, PLN (Rollon UEX, UES, UEN)

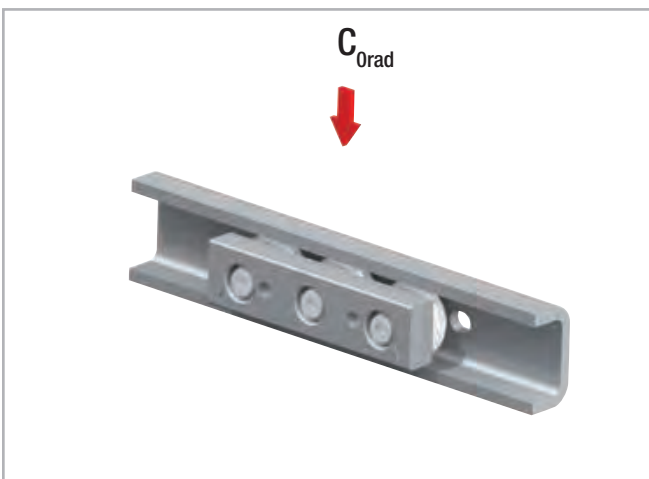


Fig. 9

Rail type	Configuration	C_{Orad} [N]
PLE	PLE-20 – MLE20	300
	PLE-30 – MLE30	800
	PLE-45 – MLE45	1600
PLS	PLS-20 – MLS20	326
	PLS-30 – MLS30	870
	PLS-45 – MLS45	1740
PLN	PLN-40 - KFN40-135	1600
	PLN-40 - KFN40-195	2160

Tab. 2

Product dimensions



> Guide with shaped raceways in stainless steel

PFE (Rollon TEX) rail in stainless steel

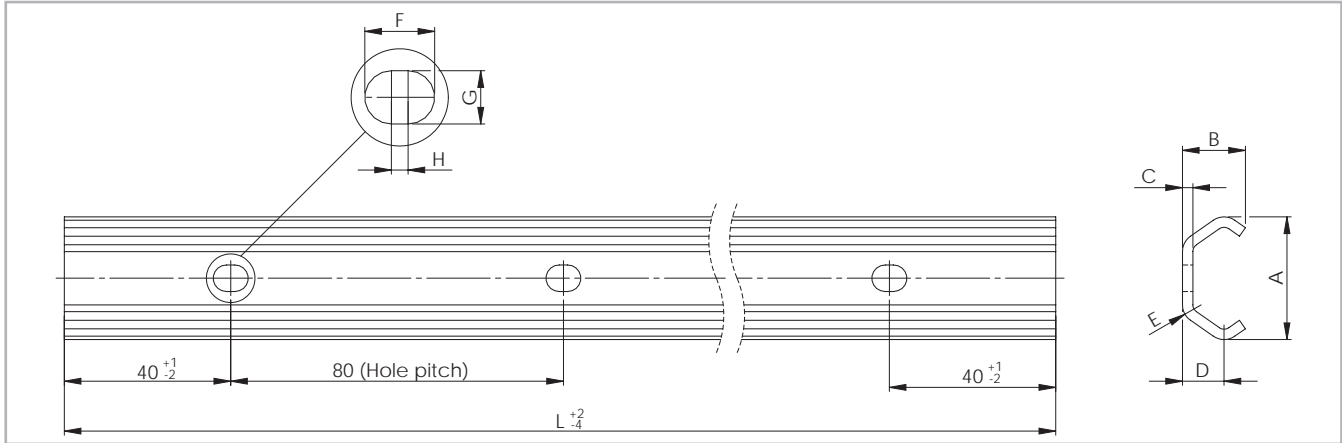


Fig. 10

Rail type	Size	A [mm]	B [mm]	C [mm]	D [mm]	E [mm]	F [mm]	G [mm]	H [mm]	Holes for screws	Weight [kg/m]
PFE	20	19,2	10	2	7	3	7	4,5	2	M4	0,47
	26	26	14	2,5	9,5	4	6,5	6,5	*	M5	0,80
	30	29,5	15	2,5	10	4,5	8,4	6,4	2	M5	0,90
	40	39,5	21	3	13	6	11	9	2	M8	1,55
	45	46,4	24	4	15,5	6,5	11	9	2	M8	2,29

* Cylindrical holes.

Tab. 3


Rail type	Size	Standard length L [mm]
PFE	20 30 45	160 - 240 - 320 - 400 - 480 - 560 - 640 - 720 - 800 - 880 - 960 - 1040 - 1120 - 1200 - 1280 - 1360 - 1440 - 1520 - 1600 - 1680 - 1760 - 1840 - 1920 - 2000 - 2080 - 2160 - 2240 - 2320 - 2400 - 2480 - 2560 - 2640 - 2720 - 2800 - 2880 - 2960 - 3040 - 3120
	26	160 - 240 - 320 - 400 - 480 - 560 - 640 - 720 - 800 - 880 - 960 - 1040 - 1120 - 1200 - 1280 - 1360 - 440 - 1520 - 1600 - 1680 - 1760 - 1840 - 1920 - 2000 - 2080 - 2160 - 2240 - 2320 - 2400 - 2480 - 2560 - 2640 - 2720 - 2800 - 2880 - 2960 - 3040 - 3120 - 3200 - 3280 - 3360 - 3440 - 3520 - 3600 - 3680 - 3760 - 3840 - 3920 - 4000
	40	320 - 400 - 480 - 560 - 640 - 720 - 800 - 880 - 960 - 1040 - 1120 - 1200 - 1280 - 1360 - 440 - 1520 - 1600 - 1680 - 1760 - 1840 - 1920 - 2000 - 2080 - 2160 - 2240 - 2320 - 2400 - 2480 - 2560 - 2640 - 2720 - 2800 - 2880 - 2960 - 3040 - 3120 - 3200 - 3280 - 3360 - 3440 - 3520 - 3600 - 3680 - 3760 - 3840 - 3920 - 4000

Please specify hole pattern separately
 Special lengths or pitches available upon request, please contact the sales department
 The highlighted rail lengths are available from stock

Tab. 4

KFE / MFE (Rollon CEX) slider for rail PFE (Rollon TEX) 20, 30, 45

Version 1 (with compact body for fixed rails)

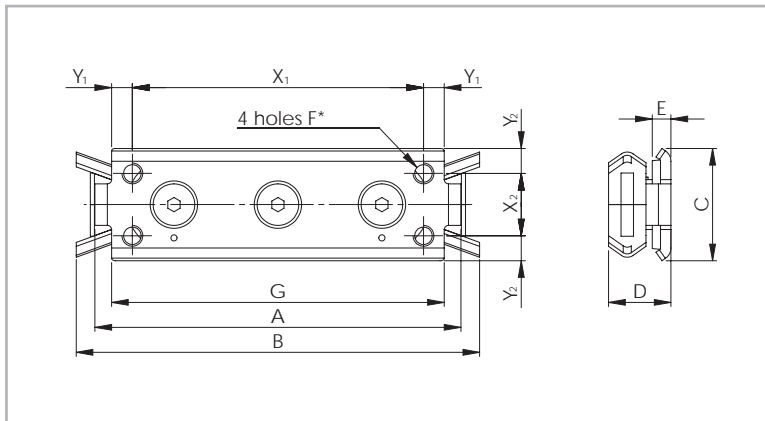


* For size 20: 2 M5 holes on the centreline with distance X_1

Fig. 11

Slider type	Size	A [mm]	B [mm]	C [mm]	D [mm]	E [mm]	F	G [mm]	X_1 [mm]	Y_1 [mm]	X_2 [mm]	Y_2 [mm]	Weight [kg]
KFE20-80-3-2RS	20	80	90	18	11,5	5,5	M5	71	60	5,5	-	9	0,05
KFE30-88-3-2RS	30	88	97	27	15	4,5	M5	80	70	5	15	6	0,11
KFE45-150-3-2RS	45	150	160	40	22	4	M6	135	120	7,5	23	8,5	0,40

Tab. 6

Version 2 (with solid body for fixed rails)

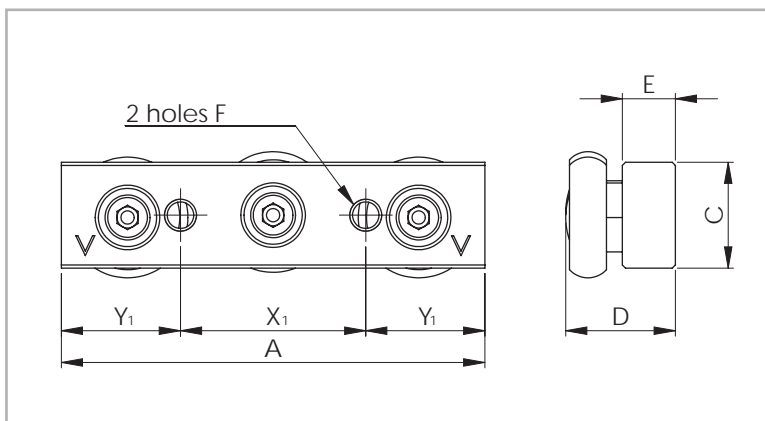

Slider version with wipers on request

Fig. 12

Slider type	Size	A [mm]	C [mm]	D [mm]	E [mm]	F	X_1 [mm]	Y_1 [mm]	Weight [kg]
MFE20-60-3-2RS	20	60	10	13	6	M5	20	20	0,04
MFE30-80-3-2RS	30	80	20	20,7	10	M6	35	22,5	0,17
MFE45-120-3-2RS	45	120	25	28,9	12	M8	55	32,5	0,47

Tab. 7

KFE (Rollon CEX) slider for rail PFE (Rollon TEX) 26, 40

Version 3 (with compact body for fixed rails)

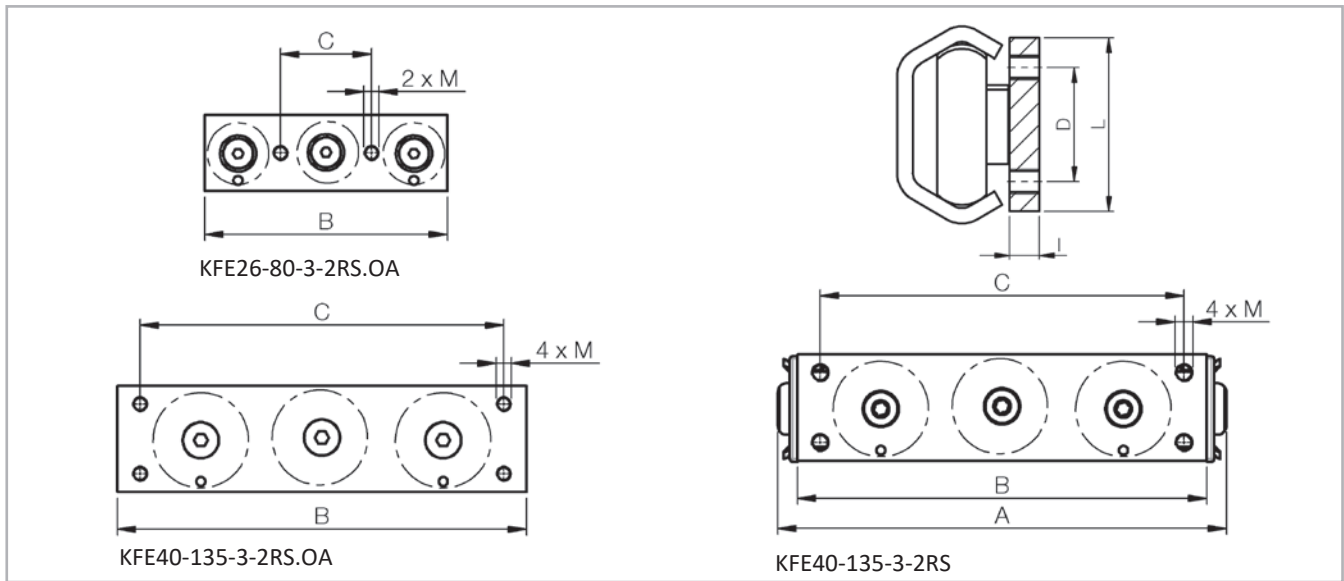


Fig. 13

Slider type	I [mm]	L [mm]	M	A [mm]	B [mm]	C [mm]	D [mm]	Weight [kg]
KFE26-80-3-2RS.OA 4	20		M5	-	80	30	-	0.095
KFE40-135-3-2RS.OA		35	M6	-	135	120	23	0.430
KFE40-135-3-2RS 6	148			0.450				

Tab. 8

> Guide with flat raceways in stainless steel

PLE (Rollon UEX) rail in stainless steel

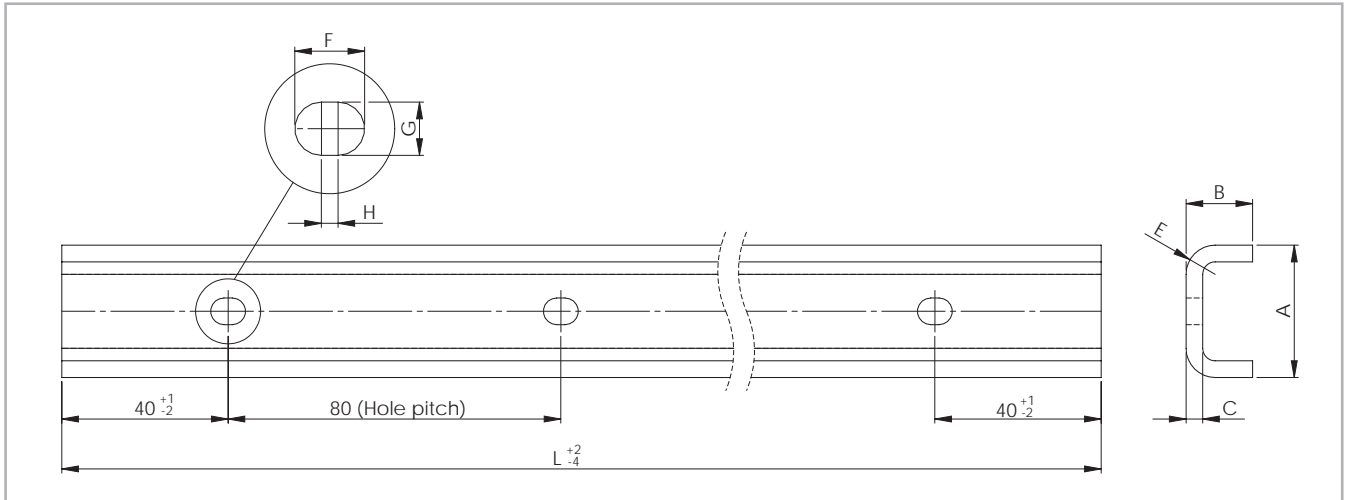


Fig. 14

Rail type	Size	A [mm]	B [mm]	C [mm]	E [mm]	F [mm]	G [mm]	H [mm]	Holes for screws	Weight [kg/m]
PLE	20	20,5	11	3	5,5	7	4,5	2	M4	0,77
	30	31,8	16	4	7	8,4	6,4	2	M5	1,39
	45	44,8	24,5	4,5	9,5	11	9	2	M8	2,79

Tab. 9

Rail type	Standard length L [mm]
PLE	160 - 240 - 320 - 400 - 480 - 560 - 640 - 720 - 800 - 880 - 960 - 1040 - 1120 - 1200 - 1280 - 1360 - 1440 - 1520 - 1600 - 1680 - 1760 - 1840 - 1920 - 2000 - 2080 - 2160 - 2240 - 2320 - 2400 - 2480 - 2560 - 2640 - 2720 - 2800 - 2880 - 2960 - 3040 - 3120

Tab. 10


Please specify hole pattern separately

Special lengths or pitches available upon request, please contact the sales department

The highlighted rail lengths are available from stock

MLE (Rollon CEXU) slider for PLE (Rollon UEX) rail

Version 4 (with solid body for compensating rail)

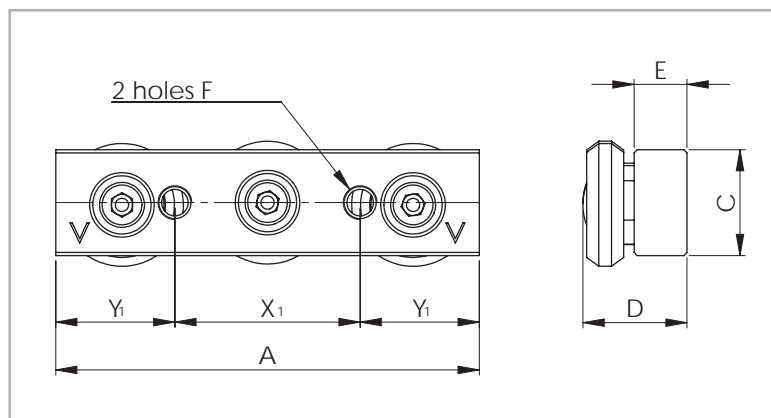

Slider version with wipers on request

Fig. 15

Slider type	Size	A [mm]	C [mm]	D [mm]	E [mm]	F [mm]	X ₁ [mm]	Y ₁ [mm]	Weight [kg]
MLE20-60-3-2RS	20	60	10	11.85	6	M5	20	20	0.04
MLE30-80-3-2RS	30	80	20	19.9	10	M6	35	22.5	0.16
MLE45-120-3-2RS	45	120	25	26.4	12	M8	55	32.5	0.45

Tab. 11

> PFE-PLE (Rollon TEX-UEX): Mounted sliders and rails

Guide with shaped raceways




Fig. 16

Version 1
(Slider with compact body)

Configuration	A [mm]	B [mm]	C [mm]	D [mm]
PFE-20 – KFE20-80-3-2RS	19.2	16	18	2.5
PFE-30 – KFE30-88-3-2RS	29.5	20.5	27	3.5
PFE-45 – KFE45-150-3-2RS	46.4	31	40	5

Tab. 12




Fig. 17

Version 2
(Slider with solid body)

Configuration	A [mm]	B [mm]	C [mm]	D [mm]
PFE-20 – MFE20-60-3-2RS	19.2	17.8	10	2.6
PFE-30 – MFE30-80-3-2RS	29.5	26.5	20	3.3
PFE-45 – MFE45-120-3-2RS	46.4	38	25	5.1

Tab. 13




Fig. 18

Version 3
(Slider with compact body)

Configuration	A [mm]	B [mm]	C [mm]	D [mm]
PFE-26 – KFE26-80-3-2RS	26	22	20	3.7
PFE-40 – KFE40-135-3-2RS	39.5	28.65	35	5

Tab. 14

Guide with flat raceways




Fig. 19

Version 4
(Slider with solid body)

Configuration	A [mm]	B _{nom} [mm]	C [mm]	D [mm]
PLE-20 – MLE20-60-3-2RS	20.5	18.25 ± 0.6	10	3.4
PLE-30 – MLE30-80-3-2RS	31.8	27.95 ± 1.0	20	4.05
PLE-45 – MLE45-120-3-2RS	44.8	37.25 ± 1.75	25	6.35

Tab. 15

> Guide with shaped raceways in zinc-plated steel

PFS (Rollon TES) rail in zinc-plated steel

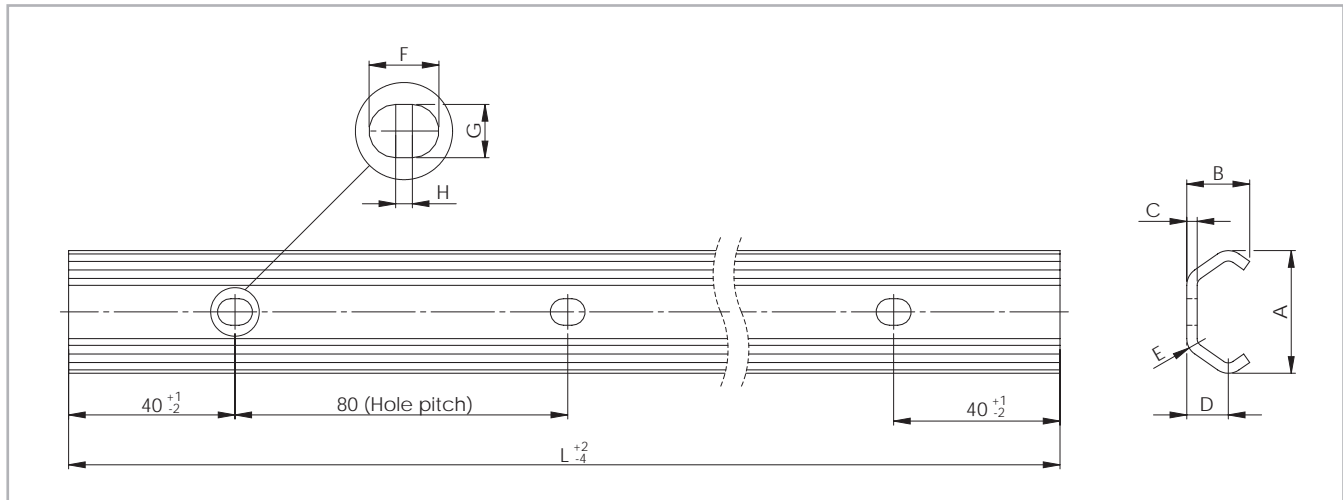


Fig. 20

Rail type	Size	A [mm]	B [mm]	C [mm]	D [mm]	E [mm]	F [mm]	G [mm]	H [mm]	Holes for screws	Weight [kg/m]
PFS	20	19.2	10	2	7	3	7	4.5	2	M4	0.47
	26	26	14	2.5	9.5	4	6.5	6.5	*	M5	0.80
	30	29.4	14.1	2.5	10	4.5	8.4	6.4	2	M5	0.90
	40	39.5	21	3	13	6	11	9	2	M8	1.55
	45	46.4	24	4	15.5	6.5	11	9	2	M8	2.29

* Rail size 26 have cylindrical holes.

Tab. 16


Rail type	Size	Standard length L [mm]
PFS	20 30 45	160 - 240 - 320 - 400 - 480 - 560 - 640 - 720 - 800 - 880 - 960 - 1040 - 1120 - 1200 - 1280 - 1360 - 1440 - 1520 - 1600 - 1680 - 1760 - 1840 - 1920 - 2000 - 2080 - 2160 - 2240 - 2320 - 2400 - 2480 - 2560 - 2640 - 2720 - 2800 - 2880 - 2960 - 3040 - 3120
	26	160 - 240 - 320 - 400 - 480 - 560 - 640 - 720 - 800 - 880 - 960 - 1040 - 1120 - 1200 - 1280 - 1360 - 440 - 1520 - 1600 - 1680 - 1760 - 1840 - 1920 - 2000 - 2080 - 2160 - 2240 - 2320 - 2400 - 2480 - 2560 - 2640 - 2720 - 2800 - 2880 - 2960 - 3040 - 3120 - 3200 - 3280 - 3360 - 3440 - 3520 - 3600 - 3680 - 3760 - 3840 - 3920 - 4000
	40	320 - 400 - 480 - 560 - 640 - 720 - 800 - 880 - 960 - 1040 - 1120 - 1200 - 1280 - 1360 - 440 - 1520 - 1600 - 1680 - 1760 - 1840 - 1920 - 2000 - 2080 - 2160 - 2240 - 2320 - 2400 - 2480 - 2560 - 2640 - 2720 - 2800 - 2880 - 2960 - 3040 - 3120 - 3200 - 3280 - 3360 - 3440 - 3520 - 3600 - 3680 - 3760 - 3840 - 3920 - 4000

Please specify hole pattern separately
 Special lengths or pitches available upon request, please contact the sales department
 The highlighted rail lengths are available from stock

Tab. 17

KFS / MFS (Rollon CES) slider for rail PFS (Rollon TES) 20, 30, 45

Version 1 (with compact body for fixed rails)

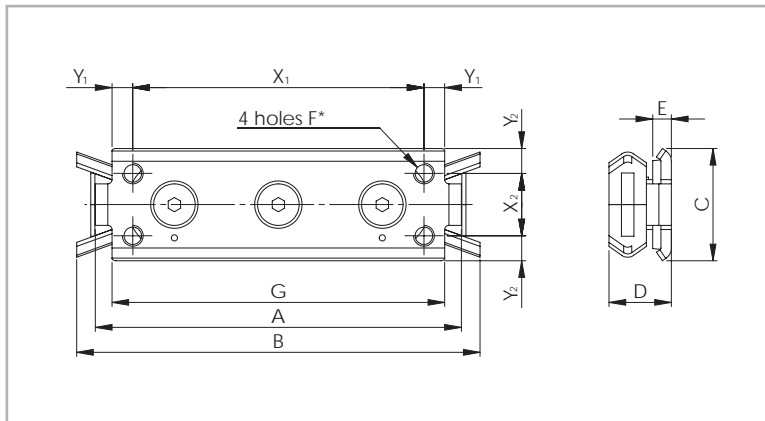


* For size 20: 2 M5 holes on the centreline with distance X_1

Fig. 21

Slider type	Size	A [mm]	B [mm]	C [mm]	D [mm]	E [mm]	F	G [mm]	X_1 [mm]	Y_1 [mm]	X_2 [mm]	Y_2 [mm]	Weight [kg]
KFS20-80-3-2Z	20	80	90	18	11.5	5.5	M5	71	60	5.5	-	9	0.05
KFS30-88-3-2Z	30	88	97	27	15	4.5	M5	80	70	5	15	6	0.11
KFS45-150-3-2Z	45	150	160	40	22	4	M6	135	120	7.5	23	8.5	0.40

Tab. 18

Version 2 (with solid body for fixed rails)

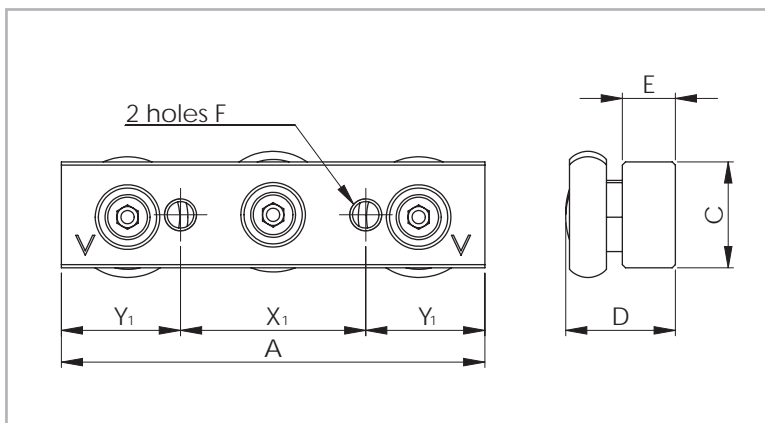

Slider version with wipers on request

Fig. 22

Slider type	Size	A [mm]	C [mm]	D [mm]	E [mm]	F	X_1 [mm]	Y_1 [mm]	Weight [kg]
MFS20-60-3-2Z	20	60	10	13	6	M5	20	20	0.04
MFS30-80-3-2Z	30	80	20	20.7	10	M6	35	22.5	0.17
MFS45-120-3-2Z	45	120	25	28.9	12	M8	55	32.5	0.47

Tab. 19

KFS (Rollon CES) slider for rail PFS (Rollon TES) 26, 40

Version 3 (with compact body for fixed rails)

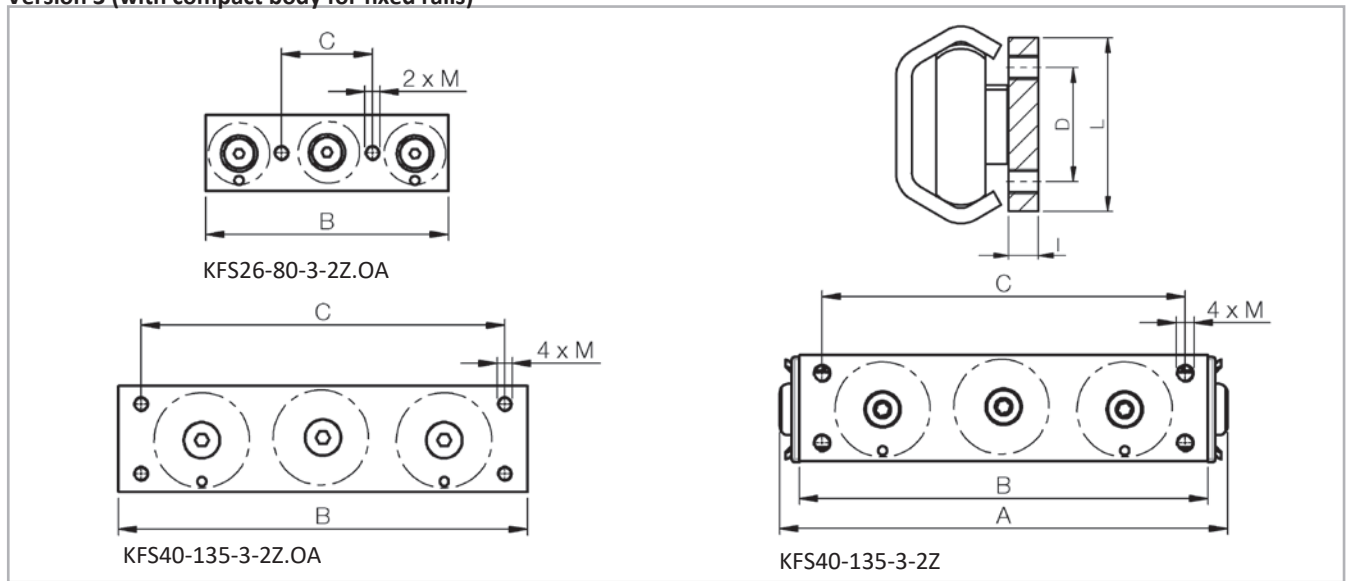


Fig. 23

Slider type	I [mm]	L [mm]	M	A [mm]	B [mm]	C [mm]	D [mm]	Weight [kg]
KFS26-80.OA-3-2Z	4	20	M5	-	80	30	-	0.095
KFS40-135.OA-3-2Z	6	35	M6	-	135	120	23	0.430
KFS40-135-3-2Z				148				0.450

Tab. 20

> Guide with flat raceways in zinc-plated steel

PLS (Rollon UES) rail in zinc-plated steel

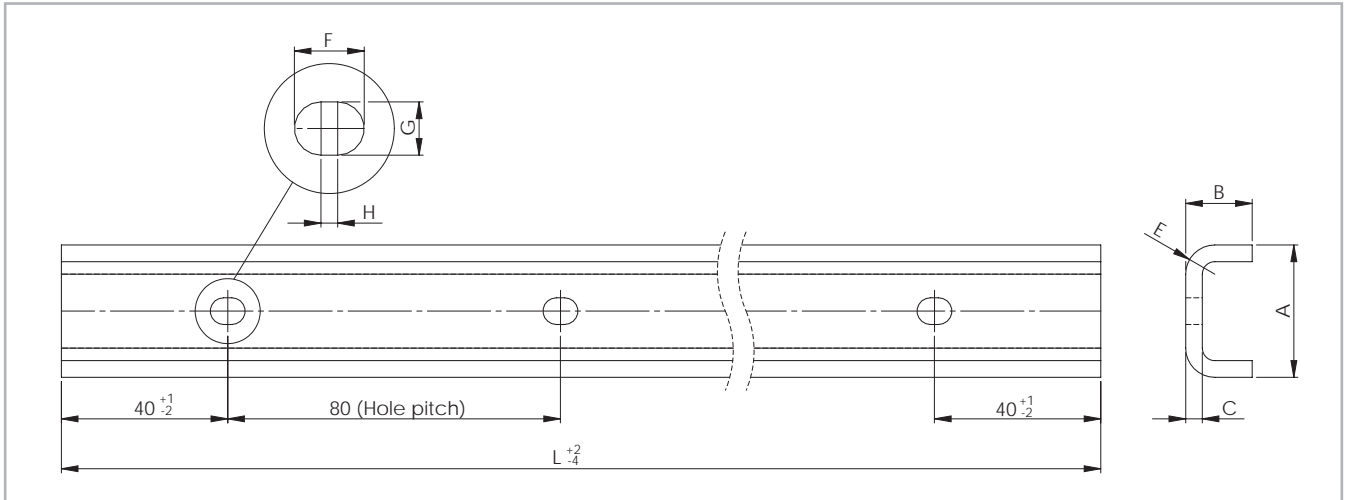


Fig. 24

Rail type	Size	A [mm]	B [mm]	C [mm]	E [mm]	F [mm]	G [mm]	H [mm]	Holes for screws	Weight [kg/m]
PLS	20	20.5	11	3	5.5	7	4.5	2	M4	0.77
	30	31.8	16	4	7	8.4	6.4	2	M5	1.39
	45	44.8	24.5	4.5	9.5	11	9	2	M8	2.79

Tab. 21

Rail type	Standard length L [mm]
PLS	160 - 240 - 320 - 400 - 480 - 560 - 640 - 720 - 800 - 880 - 960 - 1040 - 1120 - 1200 - 1280 - 1360 - 1440 - 1520 - 1600 - 1680 - 1760 - 1840 - 1920 - 2000 - 2080 - 2160 - 2240 - 2320 - 2400 - 2480 - 2560 - 2640 - 2720 - 2800 - 2880 - 2960 - 3040 - 3120

Please specify hole pattern separately


Special lengths or pitches available upon request, please contact the sales department

The highlighted rail lengths are available from stock

Tab. 22

MLS (Rollon CESU) slider for PLS (Rollon UES) rail

Version 4 (with solid body for compensating rail)

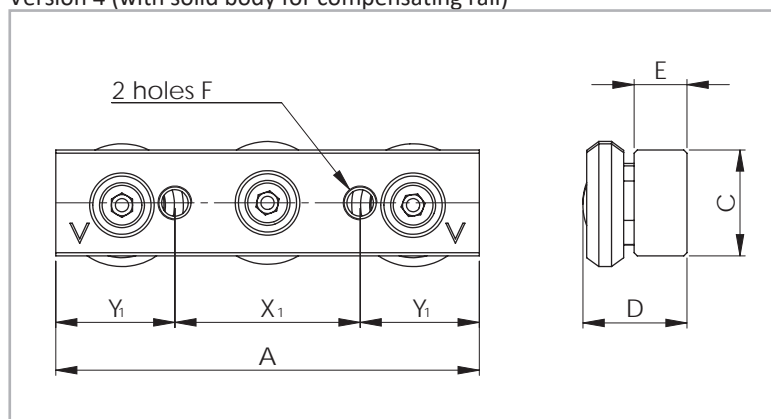

Slider version with wipers on request

Fig. 25

Slider type	Size	A [mm]	C [mm]	D [mm]	E [mm]	F [mm]	X ₁ [mm]	Y ₁ [mm]	Weight [kg]
MLS20-60-3-2Z	20	60	10	11.85	6	M5	20	20	0.04
MLS30-80-3-2Z	30	80	20	19.9	10	M6	35	22.5	0.16
MLS45-120-3-2Z	45	120	25	26.4	12	M8	55	32.5	0.45

Tab. 23

> PFS-PLS (Rollon TES-UES): Mounted sliders and rails

Guide with shaped raceways




Fig. 26

Version 1
(Slider with compact body)

Configuration	A [mm]	B [mm]	C [mm]	D [mm]
PFS-20 – KFS20-80-3-2Z	19.2	16	18	2.5
PFS-30 – KFS30-88-3-2Z	29.4	20.5	27	3.5
PFS-45 – KFS45-150-3-2Z	46.4	31	40	5

Tab. 24




Fig. 27

Version 2
(Slider with solid body)

Configuration	A [mm]	B [mm]	C [mm]	D [mm]
PFS-20 – MFS20-60-3-2Z	19.2	17.8	10	2.6
PFS-30 – MFS30-80-3-2Z	29.4	26.5	20	3.3
PFS-45 – MFS45-120-3-2Z	46.4	38	25	5.1

Tab. 25




Fig. 28

Version 3
(Slider with compact body)

Configuration	A [mm]	B [mm]	C [mm]	D [mm]
PFS-26 – KFS26-80-3-2Z	26	22	20	3.7
PFS-40 – KFS40-135-3-2Z	39.5	28.65	35	5

Tab. 26

Guide with flat raceways




Fig. 29

Version 4
(Slider with solid body)

Configuration	A [mm]	B _{nom} [mm]	C [mm]	D [mm]
PLS-20 – MLS20-60-3-2Z	20.5	18.25 ± 0.6	10	3.4
PLS-30 – MLS30-80-3-2Z	31.8	27.95 ± 1.0	20	4.05
PLS-45 – MLS45-120-3-2Z	44.8	37.25 ± 1.75	25	6.35

Tab. 27

> **PFN / PFP (Rollon TEN/TEP) Fest- und PLN (Rollon UEN) - guide with shaped or flat raceways hardened with Rollon-Nox patented process.**

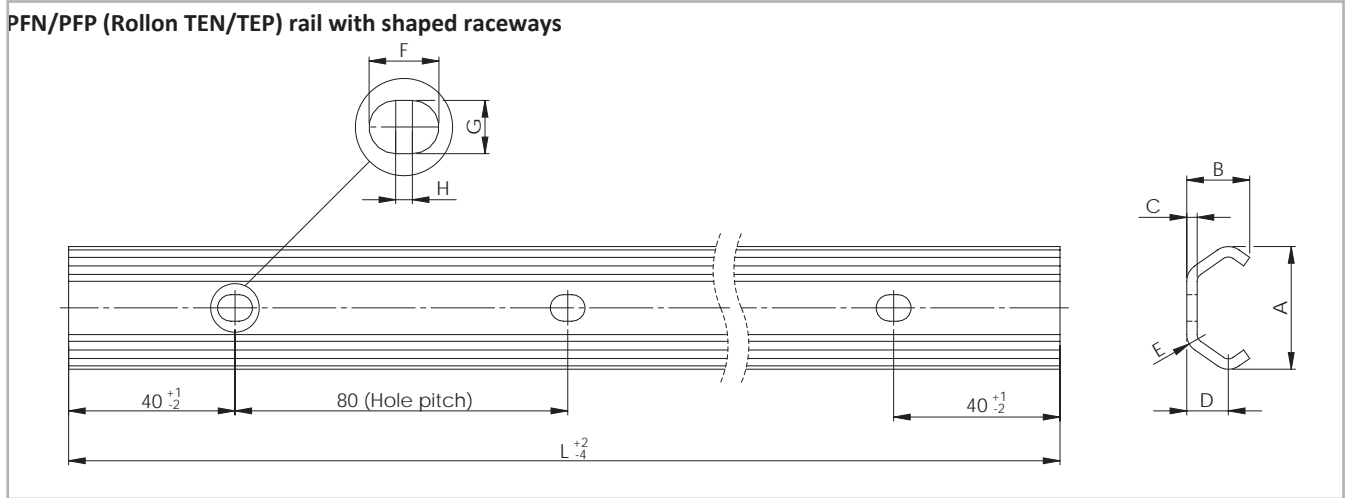


Fig. 30

PLN (Rollon UEN) rail with flat raceways

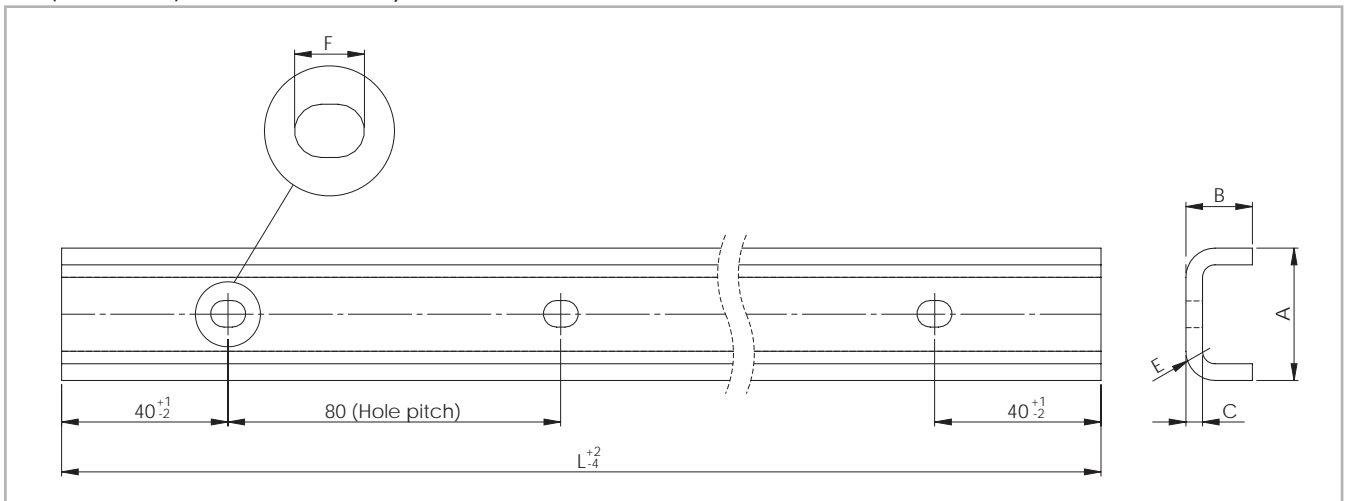


Fig. 31

Rail type	Sezione	A [mm]	B [mm]	C [mm]	E [mm]	F [mm]	G [mm]	H [mm]	Holes for screws	Weight [kg/m]
PFN	26	26	14	2.5	4	6.5	6.5	*	M5	0.80
PFP	30	29.4	14.1	2.5	4	8.4	6.4	2	M5	0.95
PFN	40	39.5	21	3	6	11	9	2	M8	1.55
PLN	40	38.5	21	3	4	11	9	2	M8	1.70

* Cylindrical holes.

Tab. 28

Rail type	Standard length L [mm]
PFN/PFP PLN	160 - 240 - 320 - 400 - 480 - 560 - 640 - 720 - 800 - 880 - 960 - 1040 - 1120 - 1200 - 1280 - 1360 - 1440 - 1520 - 1600 - 1680 - 1760 - 1840 - 1920 - 2000 - 2080 - 2160 - 2240 - 2320 - 2400 - 2480 - 2560 - 2640 - 2720 - 2800 - 2880 - 2960 - 3040 - 3120 - 3200 - 3360 - 3440 - 3520 - 3600 - 3680 - 3760 - 3840 - 3920 - 4000

Please specify hole pattern separately
 Special lengths or pitches available upon request, please contact the sales department
 The highlighted rail lengths are available from stock

Tab. 29

Version	Characteristics
BASIC	Rolled steel rail with "ROLLON-NOX" nitride hardening, black oxidation, cut to size after treatment. The cut ends are protected with black spray paint.
K	As base version, but with additional treatment "ROLLON e-coating" black electro painting on the entire surface, except on the inner raceway area, providing a high corrosion resistance. The raceways are still protected by the standard oxidation and raceway lubrication.

Tab. 30

Optional surface treatments where high corrosion resistance is required: Rollon e-coating technology, black epoxy resin electrodeposition with controlled thickness on the entire surface, except on the raceways, as masked before electrodepositioning. The raceways remain with standard oxidation treatment and protected with a thin layer of lubricant, released by the wipers.

- Black glossy finish
- Excellent resistance in humid ambients
- Good resistance to oils and hydrocarbons

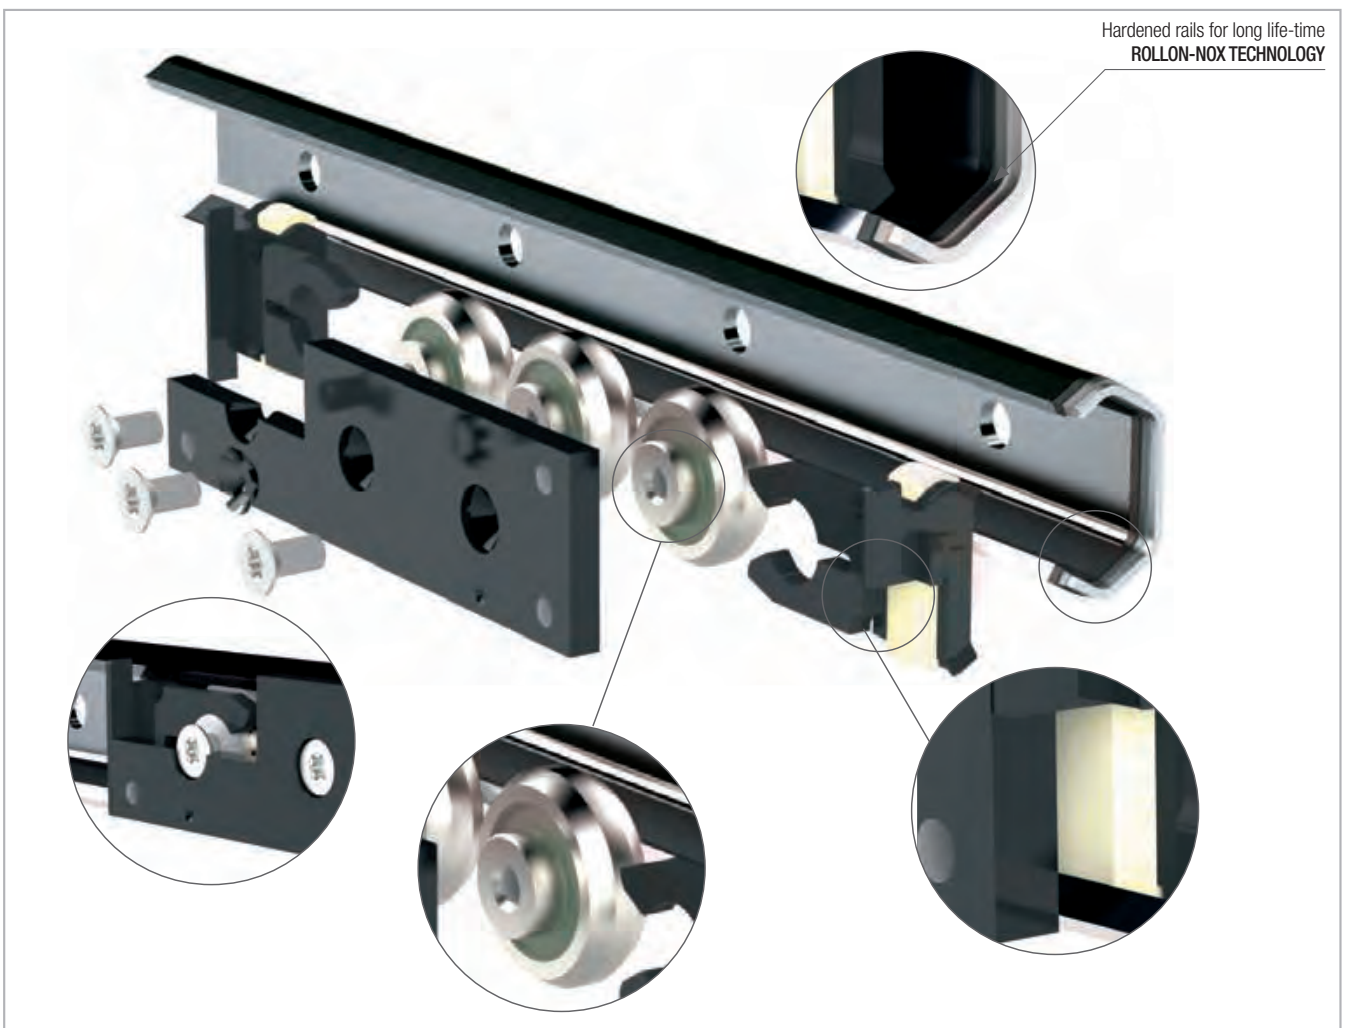


Fig. 32

KFN (Rollon CEN) slider for rail PFN (Rollon TEN) 26

The KFN slider has slim steel body with black glossy cataphoresis painting for high corrosion resistance. Available in 3 and 5 roller version, with and without wipers.

Version 5 (slider with compact body for fixed rails)

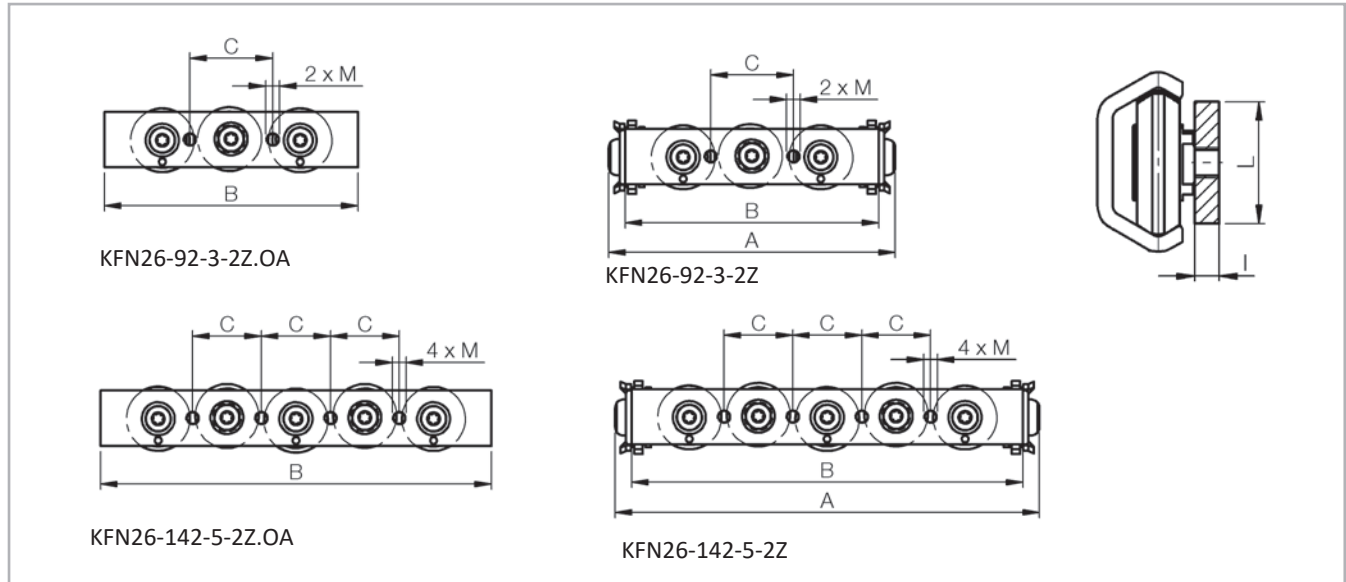


Fig. 33

Slider type	Rail type	I [mm]	L [mm]	M [mm]	A [mm]	B [mm]	C [mm]	Weight [kg]	Dynamic coefficient C [N]
KFN26-92-3-2Z.OA	PFN26	4	20	M5	-	92	30	0.10	1280
KFN26-92-3-2Z					104			0.11	
KFN26-142-5-2Z.OA					-	142	25	0.14	1730
KFN26-142-5-2Z					154			0.15	

Tab. 31

KFP-(Rollon CEP) slider for rail PFP (Rollon TEP) 30

The KFP slider has slim steel body with black glossy cataphoresis painting for high corrosion resistance. Available in 3 and 5 roller version, with and without wipers.

Version 5 (slider with compact body for fixed rails)

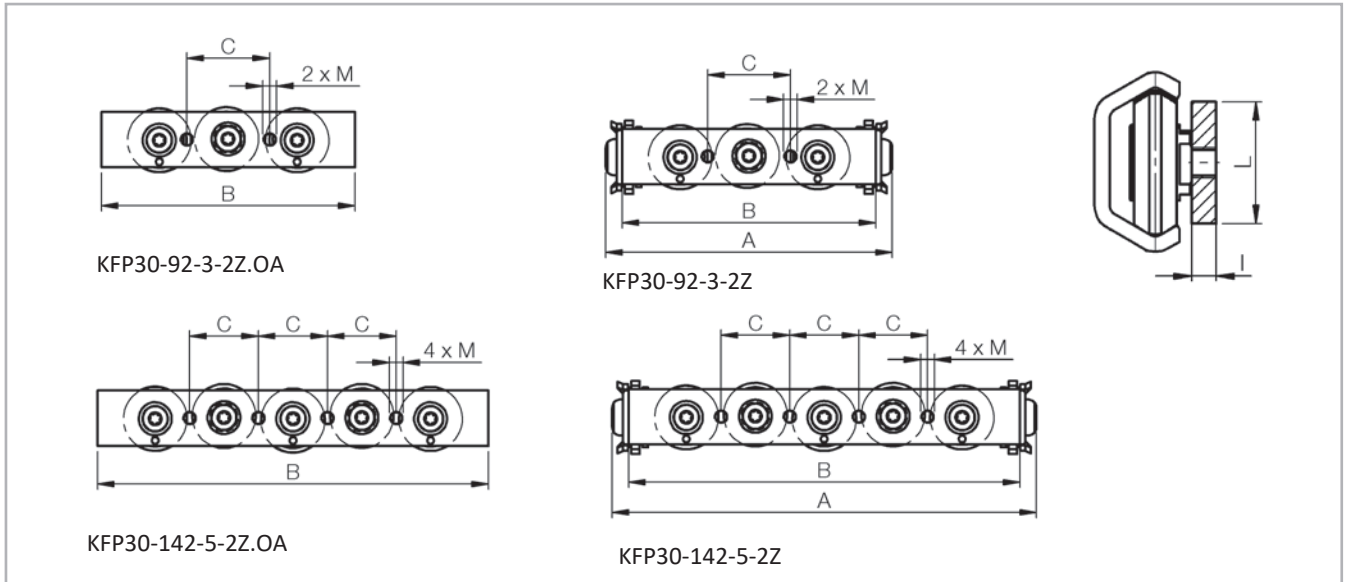


Fig. 34

Slider type	Rail type	I [mm]	L [mm]	M [mm]	A [mm]	B [mm]	C [mm]	Weight [kg]	Dynamic coefficient C [N]
KFP30-92-3-2Z.OA	PFP30	4	20	M5	-	92	30	0.12	1360
KFP30-92-3-2Z					104			0.13	
KFP30-142-5-2Z.OA					-	142	25	0.16	1830
KFP30-142-5-2Z					154			0.17	

Tab. 32

KFN (Rollon CEN) slider for rail PFN (Rollon TEN)-40 and PLN (Rollon UEN)-40

The KFP slider has slim steel body with black glossy cataphoresis painting for high corrosion resistance. Available in 3 and 5 roller version, with and without wipers.

Version 6 (slider with compact body for fixed rails and compensating rails)

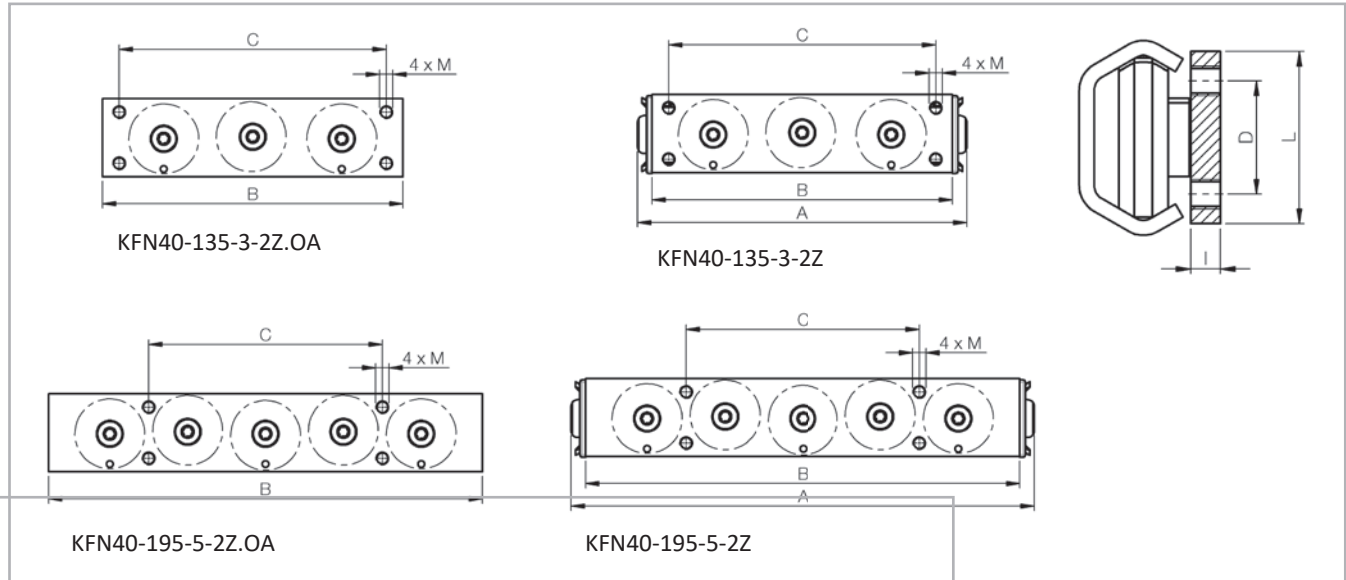


Fig. 35

Slider type	Rail type	I [mm]	L [mm]	M [mm]	A [mm]	B [mm]	C [mm]	D [mm]	Weight [kg]	Dynamic coefficient C [N]
KFN40-135-3-2Z.OA	PFN40	6	35	M6	-	135	120	23	0.43	2720
KFN40-135-3-2Z					148				0.45	
KFN40-195-5-2Z.OA					-	195	105		0.60	3670
KFN40-195-5-2Z					208				0.62	
KFN40-135-3-2Z.OA	PLN40	6	35	M6	-	135	120	23	0.43	1820
KFN40-135-3-2Z					148				0.45	
KFN40-195-5-2Z.OA					-	195	105		0.60	2460
KFN40-195-5-2Z					208				0.62	

When sliders are mounted in UEN rails load capacities are reduced (see p. XR-5, Tab. 2)

Tab. 33

> PFN-PLN-PFP (Rollon TEN-UEN-TEP): Mounted sliders and rails

Guide with shaped raceways




Fig. 36

Version 5
(Slider with compact body)

Configuration	A [mm]	B [mm]	C [mm]	D [mm]
PFN-26 – KFN26-92 PFN-26 – KFN26-142	26	22	20	3.7
PFP-30 – KFP30-3 PFP-30 – KFP30-5	29.4	19.9	20	3.3

Tab. 34

Guide with flat or shaped raceways

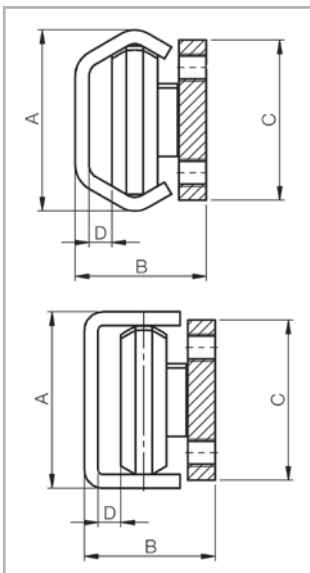


Fig. 37

Version 6
(Slider with compact body)

Configuration	A [mm]	B [mm]	C [mm]	D [mm]
PFN-40 – KFN40-135 PFN-40 – KFN40-195	39.5	28.65	35	5
PLN-40 – KFN40-135 PLN-40 – KFN40-195	38.5	28.65	35	5

Tab. 35

Accessories

> Rollers

Version 1

(Slider with compact body for fixed rails)

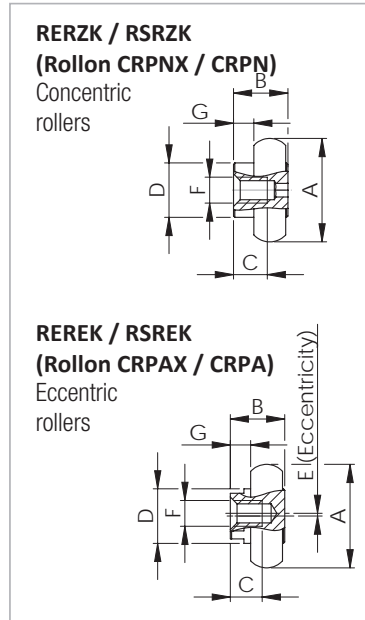


Fig. 38

Roller type	for slider	A [mm]	B [mm]	C [mm]	D [mm]	E [mm]	F	G [mm]	C _{Orad} [N]	Weight [kg]
RERZK20-2RS	KFE20-80-3-2RS	14	8.5	6	8	-	M4	4.0	150	0.006
RSRZK20-2Z	KFS20-80-3-2Z					163				
REREK20-2RS	KFE20-80-3-2RS					0.5			150	
RSREK20-2Z	KFS20-80-3-2Z					163				
RERZK30-2RS	KFE30-88-3-2RS	22.8	12	7	12	-	M5	4.5	400	0.02
RSRZK30-2Z	KFS30-88-3-2Z					435				
REREK30-2RS	KFE30-88-3-2RS					0.6			400	
RSREK30-2Z	KFS30-88-3-2Z					435				
RERZK45-2RS	KFE45-150-3-2RS	35.6	18	12	16	-	M6	6.0	800	0.068
RSRZK45-2Z	KFS45-150-3-2Z					870				
REREK45-2RS	KFE45-150-3-2RS					0.8			800	
RSREK45-2Z	KFS45-150-3-2Z					870				

2RS (splashproof seal for CEX slider), 2Z (dust cover seal for CES slider)

Tab. 36

Version 2

(Slider with solid body for fixed rails)

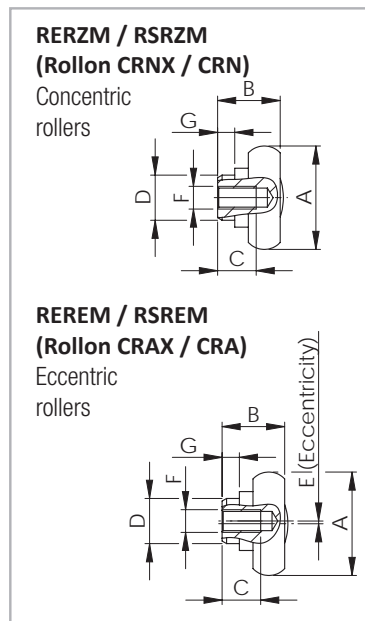


Fig. 39

Roller type	for slider	A [mm]	B [mm]	C [mm]	D [mm]	E [mm]	F	G [mm]	C _{Orad} [N]	Weight [kg]
RERZM20-2RS	MFE20-60-3-2RS	14	8.7	6	6	-	M4	1.8	150	0.006
RSRZM20-2Z	MFS20-60-3-2Z					163				
REREM20-2RS	MFE20-60-3-2RS					0.5			150	
RSREM20-2Z	MFS20-60-3-2Z					163				
RERZM30-2RS	MFE30-80-3-2RS	22.8	14	9	10	-	M5	3.8	400	0.022
RSRZM30-2Z	MFS30-80-3-2Z					435				
REREM30-2RS	MFE30-80-3-2RS					0.6			400	
RSREM30-2Z	MFS30-80-3-2Z					435				
RERZM45-2RS	MFE45-120-3-2RS	35.6	20.5	14.5	12	-	M6	4.5	800	0.07
RSRZM45-2Z	MFS45-120-3-2Z					870				
REREM45-2RS	MFE45-120-3-2RS					0.8			800	
RSREM45-2Z	MFS45-120-3-2Z					870				

2RS (splashproof seal for CEX slider), 2Z (dust cover seal for CES slider)

Tab. 37

Version 3

Slider with compact body for fixed rails

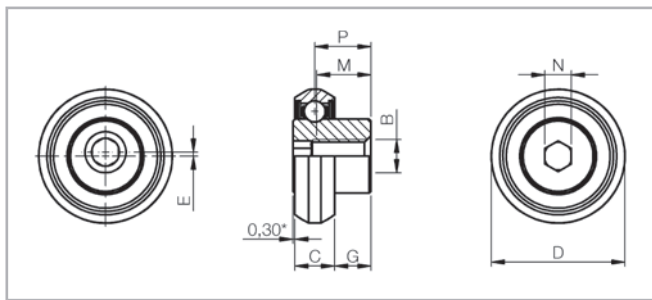


Fig. 40

RSPZK / REPZK

(Rollon RLN/RLNX)

Concentric rollers

RSPEK / REPEK

(Rollon RLA/RLAX)

Eccentric rollers

Type	for slider	E [mm]	D [mm]	C [mm]	M [mm]	G [mm]	P [mm]	N (Key)		B [mm]	C _{Orad} [N]	Weight [Kg]
								Key	N [mm]			
REPZK26	KFE26-80-3-2RS	-	20.3	6	8.5	5.5	8.2	4	4	M5	400	0.013
REPEK26		0.6									400	
RSPZK26	KFS26-80-3-2Z	-	20.2	6	8.5	5.5	8.2	4	4	M5	400	
RSPEK26		0.6									400	
REPZK40	KFE40-135-3-2RS	-	31.5	10	9.65	4.65	10	5	5	M6	800	0.048
REPEK40		0.7									800	
RSPZK40	KFS40-135-3-2Z	-	31.5	10	9.65	4.65	10	5	5	M6	800	
RSPEK40		0.7									800	

2RS (splashproof seal for KFE slider), 2Z (dust cover seal for KFS slider)

Tab. 38

Version 4

(Slider with solid body for compensating rails)

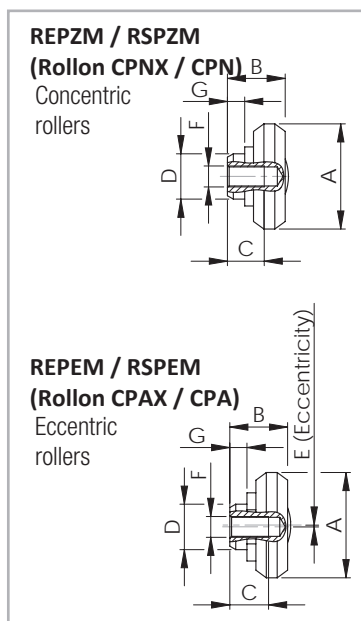


Fig. 41

REPZM / RSPZM

(Rollon CPNX / CPN)

Concentric rollers

REPEM / RSPEM

(Rollon CPAX / CPA)

Eccentric rollers

Roller type	for slider	A [mm]	B [mm]	C [mm]	D [mm]	E [mm]	F	G [mm]	C _{Orad} [N]	Weight [kg]
REPZM20-2RS	MLE20-60-3-2RS	14	7.35	5.5	6	-	M4	1.8	150	0.004
RSPZM18/20-2Z	MLS20-60-3-2Z								163	
REPEM20-2RS	MLE20-60-3-2RS								150	
RSPEM18/20-2Z	MLS20-60-3-2Z								163	
REPZM30-2RS	MLE30-80-3-2RS	23.2	13	7	10	-	M5	3.8	400	0.018
RSPZM28/30-2Z	MLS30-80-3-2Z								435	
REPEM30-2RS	MLE30-80-3-2RS								400	
RSPEM28/30-2Z	MLS30-80-3-2Z								435	
REPZM45-2RS	MLE45-120-3-2RS	35	18	12	12	-	M6	4.5	800	0.06
RSPZM43/45-2Z	MLS45-120-3-2Z								870	
REPEM45-2RS	MLE45-120-3-2RS								800	
RSPEM43/45-2Z	MLS45-120-3-2Z								870	

2RS (splashproof seal for KFE slider), 2Z (dust cover seal for KFS slider)

Tab. 39

Version 5

(Slider with compact body for fixed rails)

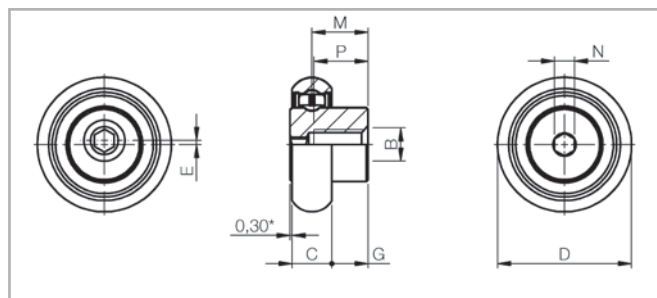


Fig. 42

RSRZK26 / RSREK26 (Rollon RLN26/RLA26)

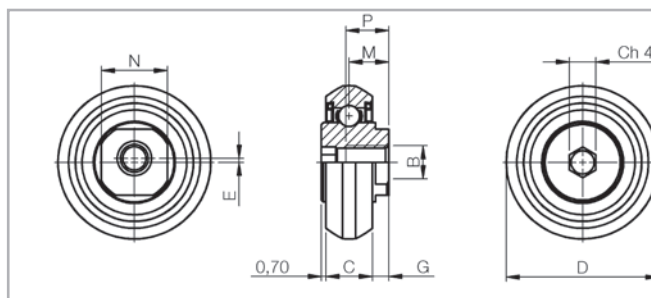


Fig. 43

RSPZKN30 / RSPEKN30 (Rollon CPN30Z-55/CPA30Z-55)

Type	for slider	E [mm]	D [mm]	C [mm]	M [mm]	G [mm]	P [mm]	N (Key)		B [mm]	C [N]	C _{0rad} [N]	Weight [Kg]
								Key	N [mm]				
RSRZK26	KFN26-92-3-2Z	-	20.2	6	8.5	5.5	8.2	4	4	M5	640	560	0.013
RSREK26	KFN26-142-5-2Z	0,6											
RSPZKN30	KFN30-92-3-2Z	-	23.15	7	6	2.5	6.5	KLM28	4	M5	680	600	0.020
RSPEKN30	KFN30-142-5-2Z	0,6											

2Z (dust cover seal for CEN slider)

Tab. 40

Version 6

(Slider with compact body for fixed rails and compensating rails)

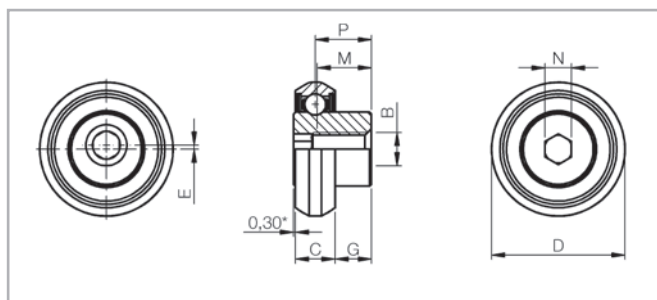


Fig. 44

RSPZK40 (Rollon RLN)

Concentric rollers

RSPEK40 (Rollon RLA)

Eccentric rollers

Type	for slider	E [mm]	D [mm]	C [mm]	M [mm]	G [mm]	P [mm]	N (Key)		B [mm]	C [N]	C _{0rad} [N]	Weight [Kg]
								Key	N [mm]				
RSPZK40	KFN40-135-3-2Z	-	31.5	10	9.65	4.65	10	5	5	M6	1360 (925*)	1200 (800*)	0.048
RSPEK40	KFN40-195-5-2Z	0.7											

2Z (dust cover seal for CEN slider)

*UEN40

Tab. 41

> Fixing screws

We recommend fixing screws according to ISO 7380 with low head height or TORX® screws (see fig. 45) on request.

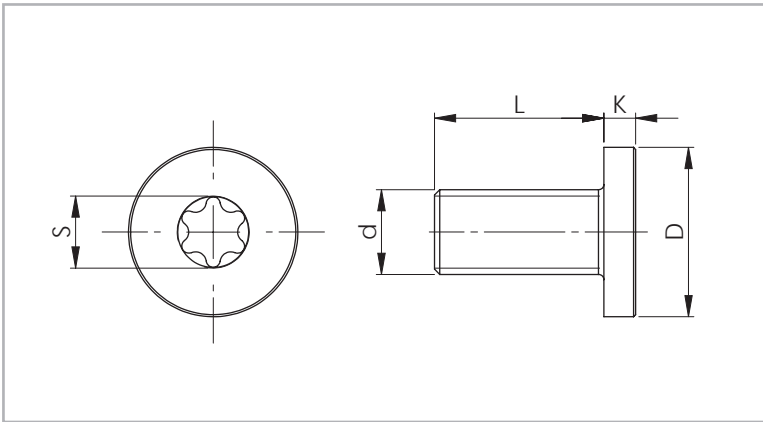


Fig. 45

Rail size	Screw type	d	D [mm]	L [mm]	K [mm]	S	Tightening torque [Nm]
20	M4 x 8	M4 x 0.7	8	8	2	T20	3
26	M5 x 10	M5 x 0.8	10	10	2	T25	9
30	M5 x 10	M5 x 0.8	10	10	2	T25	9
40	M8 x 16	M8 x 1.25	16	16	3	T40	20
45	M8 x 16	M8 x 1.25	16	16	3	T40	22

Tab. 42

Technical instructions



> Lubrication

All radial ball bearing rollers in the X-Rail series are lubricated for life. It is advisable to lubricate the raceways with specific bearing grease. The interval between lubrication treatments depends mainly on environmental conditions, bearing speed and temperature.

Under normal conditions, it is advisable to lubricate locally after 100 km of use or after six months of service. In case of critical applications, lubrication treatments should be more frequent. Before lubricating, remember to clean the raceway surfaces carefully. We advise using a lithium grease of medium consistency for rolling-element bearings.

Different lubricants are available on request for special applications:

- FDA-approved lubricant for use in the food industry
- specific lubricant for clean rooms
- specific lubricant for the marine technology sector
- specific lubricant for high and low temperatures

For specific information, contact Rollon technical support.

Under normal conditions, correct lubrication:

- reduces friction
- reduces wear
- reduces stress on contact surfaces due to elastic deformation
- reduces noise during operation
- increases the regularity of the rolling movement

> F+L-System

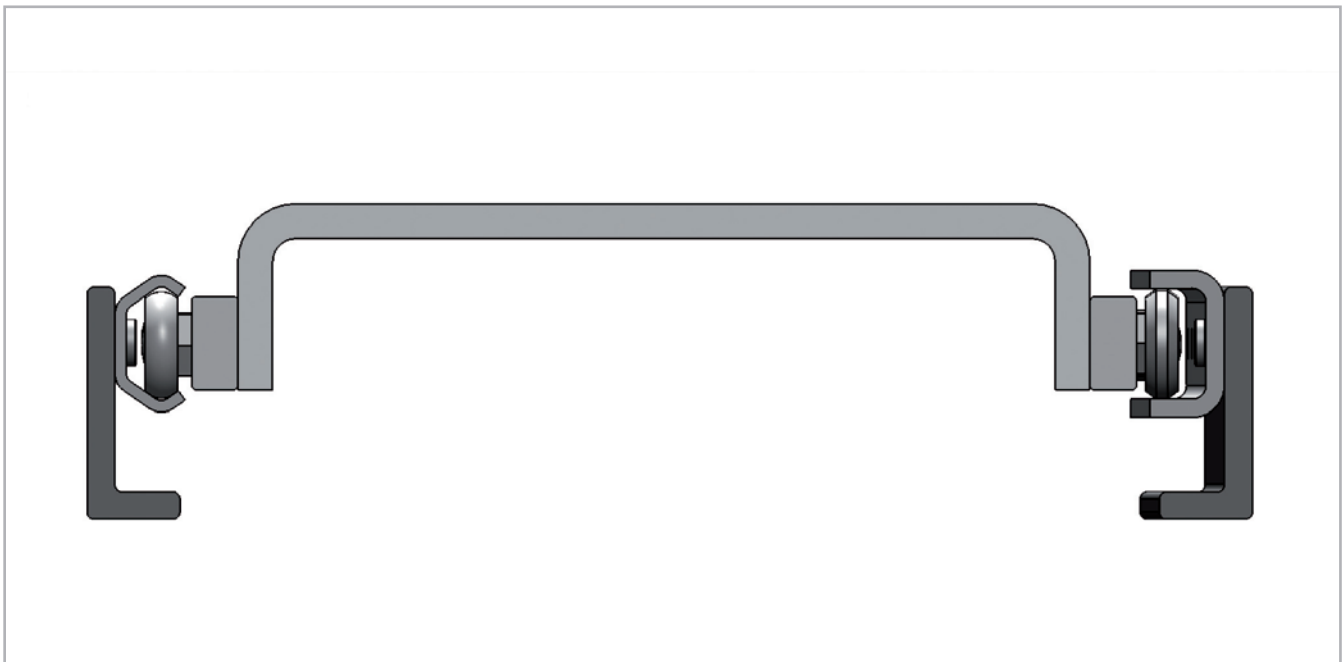


Fig. 46

Solves axial deviations in parallelism

Mounting two linear bearing rails in a parallel manner is always important but rarely easy. Distortions in axial alignment can drastically reduce the life of the rails. These distortions can bind and overload sliders. Rollon offers an outstanding solution for the alignment of dual track carriages. Using shaped and flat raceways it is possible to avoid axial deviation in parallelism of the mounting surfaces without additional modifications of those surfaces. F+L rails easily address these alignment issues to create an economical parallel rail system.

In a F+L-System, the slider in the T rail carries axial and radial loads and guides the movement of the L, which has lateral freedom.

U rails have flat parallel raceways that allow free lateral movement of the sliders. The maximum freedom a slider in the U rail can offer can be calculated using the values S_1 and S_2 (see pg. XR-29, fig. 47, tab. 43). With nominal value B_{nom} as the starting point, S_1 indicates the maximum allowed movement into the rail, while S_2 represents the maximum offset towards the outside of the rail.

If the length of the guide rail is known, the maximum allowable angle deviation of the mounting surface (see pg. XR-29, fig. 48) can be obtained. In this case the slide in the L rail has the freedom to travel from the innermost position S_1 to the outermost position S_2 .

XR-28

Maximum offset

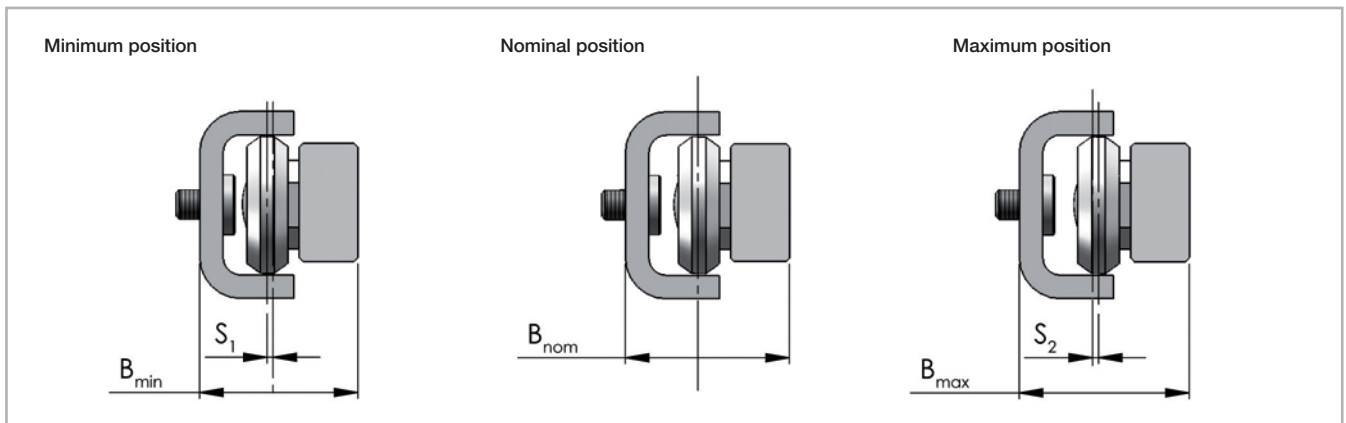


Fig. 47

Slider type (Version 4 with solid body)	S ₁ [mm]	S ₂ [mm]	B _{min} [mm]	B _{nom} [mm]	B _{max} [mm]
MLE.../MLS20-60-3-2RS/2Z	0.6	0.6	17.65	18.25	18.85
MLE.../MLS30-80-3-2RS/2Z	1	1	26.95	27.95	28.95
MLE.../MLS45-120-3-2RS/2Z	1.75	1.75	35.50	37.25	39

Tab. 43

Guideline for the maximum angle deviation α , achievable with the longest guide rail

$$\alpha = \arctan \frac{S^*}{L}$$

S* = sum of S₁ and S₂
L = length of the rail

Fig. 48

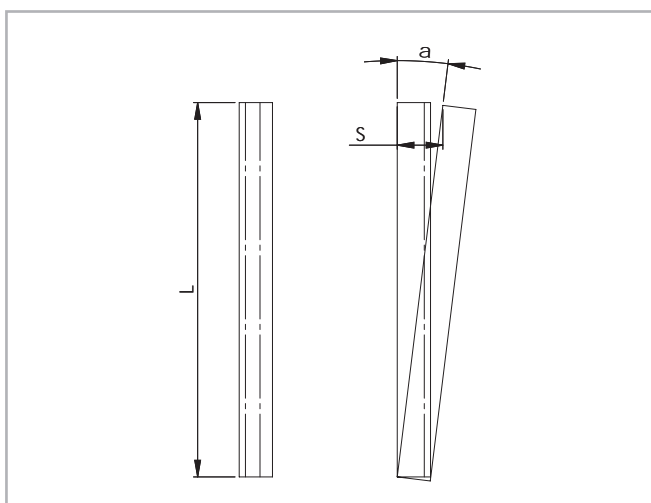


Fig. 49

Size	Rail length [mm]	Offset S* [mm]	Angle α [°]
20	3120	1.2	0.022
30	3120	2	0.037
45	3120	3.5	0.064

Tab. 44

> PFN40+PLN40 (Rollon TEN40+UEN40) self-aligning system

Used in pair with KFN-40 sliders in both rails, PFN-40 can be combined with PLN-40 to create a self-aligning system capable of tolerating alignment errors of up to 3.4 mm.

The slider in the PFN-40 guiding rail is rigidly connected, via the mobile element, to the sliders in the PFN-40 fl oating rail on the other side. The TEN-40 guiding rail ensures play-free linear motion. The slider in the PLN-40 fl oating rail is also play-free but able to move axially across the fl at raceways. This system avoids overload on the sliders as the result of rail alignment error.

The limit of axial movement of KFN-40 sliders towards the inside of PLN-40 rails is determined by the size of the heads of the rail fi xing screws (see fi gures below). In particular, Rollon's special fl at head DIN 7991 screws permit approximately 1 mm of extra axial movement compared to standard ISO 7380 screws.

The limit of axial movement towards the outside of the PLN-40 rail is determined by the point of departure of the roller from the raceway. The limit specifi ed in the catalogue guarantees suffi cient contact between rollers and raceway to support rated load.


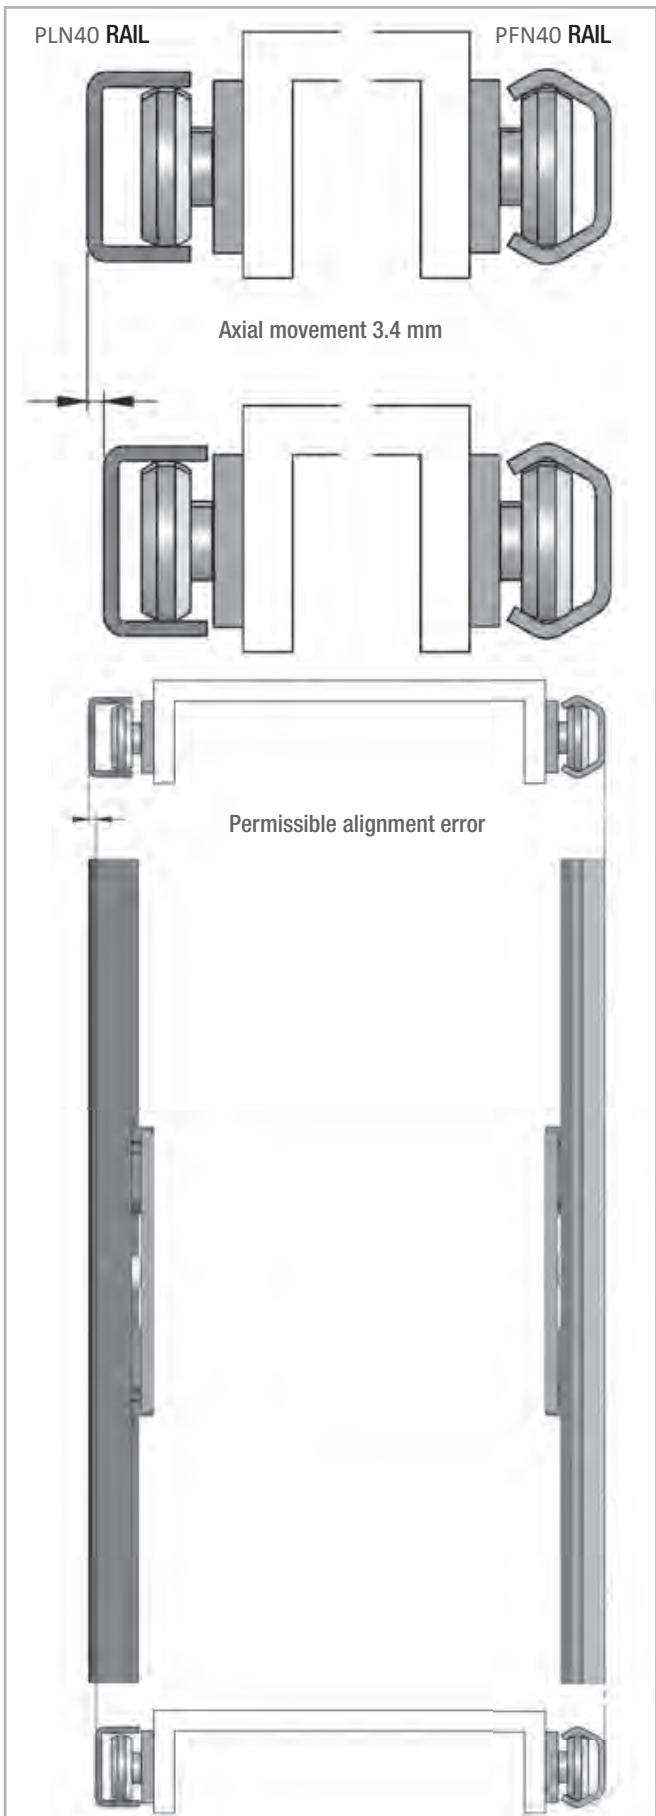


Fig. 50

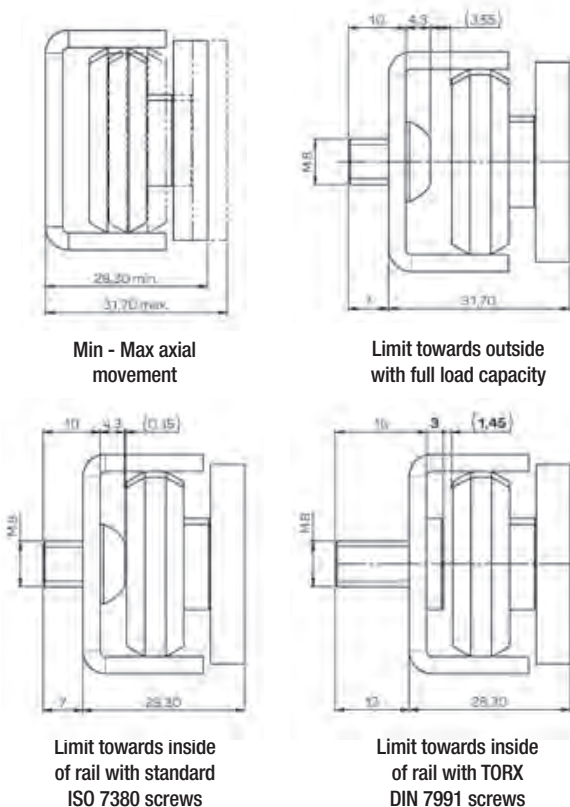

> Service life calculation

The dynamic load capacity C is a conventional variable used for calculating the service life. This load corresponds to a nominal service life of 100 km. For values of the individual slider see pg.XR-5. Load capacities. The following formula (see fig. 51) links the calculated theoretical service life to the dynamic load capacity and the equivalent load:

$$L_{km} = 100 \cdot \left(\frac{C}{P} \cdot \frac{f_c}{f_i} \cdot f_h \right)^3$$

L_{km} = theoretical service life (km)
 C = dynamic load capacity (N)
 P = effective equivalent load (N)
 f_c = contact factor
 f_i = application coefficient
 f_h = stroke factor

Fig. 51

The equivalent load P corresponds in its effects to the sum of the forces and moments working simultaneously on a slider. If these different load components are known, P results as follows:

$$P = P_r + \left(\frac{P_a}{C_{0ax}} + \frac{M_1}{M_x} + \frac{M_2}{M_y} + \frac{M_3}{M_z} \right) \cdot C_{0rad}$$

Fig. 52

Here the external loads are assumed as constant in time. Brief loads, which do not exceed the maximum load capacities, do not have any relevant effect on the service life and can therefore be neglected.

The contact factor f_c refers to applications in which several sliders pass the same rail section. If two or more sliders move over the same point of a rail, the contact factor according to table 45 to be taken into account in the formula for calculation of the service life.

Number of sliders	1	2	3	4
f_c	1	0.8	0.7	0.63

Tab. 45

The application coefficient f_i takes into account the operational conditions in the service life calculation. It has a similar significance to the safety factor S_0 in the static load test. It is calculated as described in the following table:

f_i	
Neither shocks nor vibrations, smooth and low-frequency direction change; clean operating conditions; low speeds (<1 m/s)	1 - 1.5
Slight vibrations, average speeds (1 - 2.5 m/s) and average frequency of direction change	1.5 - 2
Shocks and vibrations, high speeds (> 2.5 m/s) and high-frequency direction change; extreme dirt contamination	2 - 3.5

Tab. 46

The stroke factor f_h takes into account the higher load of the raceways and rollers during short strokes on the same total length of run. The corresponding values are taken from the following graph (for strokes longer than 1 m, $f_h = 1$):

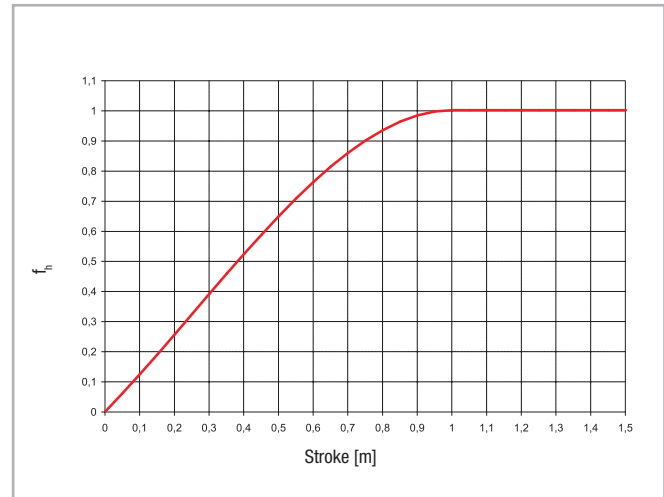


Fig. 53

> Setting preload

If the product is delivered with the sliders in the rails, the sliders are already preloaded. If delivered separately, or if the sliders need to be installed in another rail, the sliders must be readjusted. In this case, follow the instructions below:

With flat key

- (1) Wipe the raceways of any dirt and debris.
- (2) If necessary, remove existing wipers and insert the sliders into the rails. Slightly loosen the fixing screw of the center roller pin.
- (3) Position the slider(s) at the ends of the rail.
- (4) For the U rails there must be a thin support (e.g. set key) under the ends of the slider body to ensure the horizontal alignment of the slider in the flat raceways.
- (5) The included special flat key is inserted from the side between the rail and the slider and inserted onto the hexagonal or square shaft of the eccentric pin to be adjusted (see fig. 54).
- (6) By turning the flat key clockwise, the eccentric roller is pressed against the upper raceway, thereby removing clearance and setting the correct preload. During this process, absence of play is desired; avoid setting a preload that is so high that it generates high friction and reduces service life.
- (7) Hold the roller with the adjustment key in the desired position and carefully tighten the fixing screw. The exact tightening torque will be checked later.
- (8) Move the slider in the rail and check the preload over the entire length of the rail. It should move easily and the slider should not have play at any location of the rail.
- (9) Tighten the fixing screw with the specified tightening torque (see tab. 47), while holding the flat key and maintaining the angle position of the roller so as to not change the preload while tightening the screw. It is recommended to use thread locking compound.
- (10) Now re-attach the existing wipers if desired.



Fig. 54

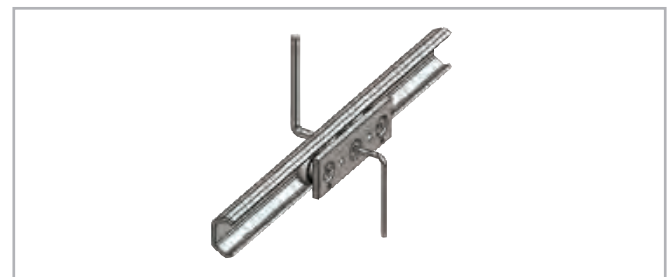


Fig. 55

With Allen Keys

- (1) Verify that the raceways are clean and take the wipers off to obtain a more sensitive feeling for correct preload setting.
- (2) Tighten the top-screw, but not too much, to allow a firm turning of the eccentric bottom-pivot, maintaining the roller tight to the slider body.
- (3) Turn the eccentric pivot so that the roller is roughly aligned with the concentric rollers or slightly in the opposite direction of the concentric rollers.
- (4) Lock the rail on a stable support, so hands are free. Insert the slider into the rail. Insert the Allen key into the pivot, through the rail fixing hole. Turn the Allen key slightly, so that the eccentric roller is coming in light contact with the raceways, opposite the fixed rollers. During the rotation, accompany the top-screw while rotating in the same direction with second Allen key, in order to avoid any loosening or change in preload setting.
- (5) Move the slider along the whole rail length to find the part or point, where the slider moves with less friction. If any oscillation/ play is noted, the eccentric roller must be re-adjusted. Perfect preload setting is achieved, when the slider moves very smoothly and with no play at this point.
- (6) Holding firm against the Allen key, engaged in eccentric pivot with one hand, while with another Allen key rotate and tighten the top-screw fastening the roller. Do not lock or unlock the eccentric roller by turning the pivot, always only act on the top screw to block or to ease the roller.
- (7) It's possible to verify the amount of preload by slowly inserting the slider at the end of the rail. The inserting force is proportional to the preload.
- (8) Then make final roller/screw tightening using a torque wrench, to assure right tightening torque according to the values in tab. 47, while maintaining the Allen key in pivot, to prevent any change of preload setting.

Size	Tightening torque [Nm]
20	3
26	7
30	7
40	10
45	12

Tab. 47

> Use of radial ball bearing rollers

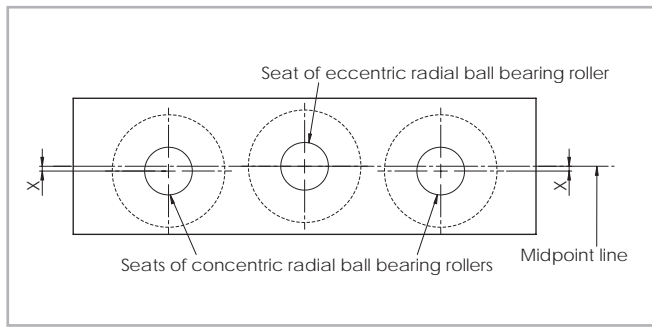


Fig. 56

Slider size	X [mm]
20	0.60
26	0.40
30*	0.65
40	0.90
45	0.60

* for PFN-30 X=0,45

Tab. 48

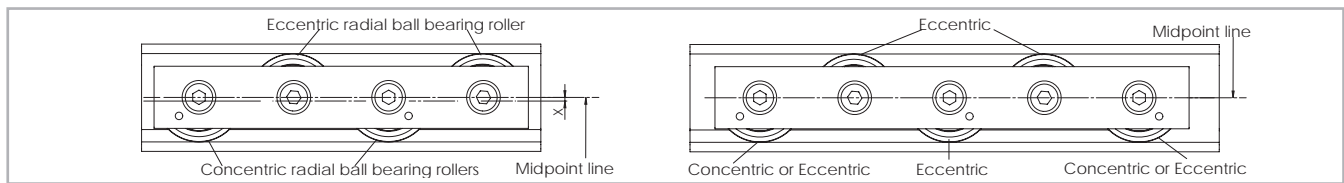


Fig. 57

If purchasing "Radial ball bearing rollers" to install on your own structure (see from p. XR-3 to XR-25) we advise:

- Using a maximum of 2 concentric radial ball bearing rollers
- Offset the seats of the concentric radial ball bearing rollers with respect to those of the eccentric radial ball bearing rollers according to the table (tab. 48).

Ordering key



> Rail / slider system

PFE30-	0960	/1/	MFE20-60	-2RS	
				Roller seal	<i>see pg. XR-4 Performance characteristics</i>
				Slider type	<i>see pg. XR-7, tab. 5 and 6 / pg. XR-9, tab. 9</i>
				Number of sliders in one rail	
				Rail length in mm	<i>see pg. XR-6, tab. 4 / pg. XR-8, tab. 8</i>
				Rail type	<i>see pg. XR-6, tab. 3 / pg. XR-8, tab. 7</i>

Ordering example: PFE-0960/1/MFE20-060-2RS

Hole pitch: 40/11 x 80/40

Notes on ordering: The rail length codes are always 4 digits; use zeroes as a prefix when lengths are shorter

> Rail

PFE	30-	0960	
		Rail length in mm	<i>see pg. XR-6, tab. 4 / pg. XR-8, tab. 8</i>
		Size	<i>see pg. XR-6, tab. 3 / pg. XR-8, tab. 7</i>
		Rail type	<i>see pg. XR-6, tab. 5 / pg. XR-8, tab. 7</i>

Ordering example: PFE-30-0960

Hole pattern: 40/11 x 80/40

Notes on ordering: The rail length codes are always 4 digits; use zeroes as a prefix when lengths are shorter

> Slider

MFS30-80	-2Z	
	Roller seal	<i>see pg. XR-6 Performance characteristics</i>
	Slider type	<i>see pg. XR-7, tab. 5 and 6 / pg. XR-9, tab. 9</i>

Ordering example: MFS30-80-2Z

> Accessories

Roller pins

REK	45	-2RS	
		Roller seal	<i>see pg. XR-6 Performance characteristics</i>
	Size	<i>see pg. XR-11, tab. 13-15</i>	
Roller type	<i>see pg. XR-11, tab. 13-15</i>		

Ordering example: REREK45-2RS

Fixing screws

Rail type	Size	Ordering description
PFE / PLE	20	TORX® screw TC 18 M4x8 NIC
	26	TORX® screw TC 28 M5x10 NIC
	30	TORX® screw TC 28 M5x10 NIC
	40	TORX® screw TC 43 M8x16 NIC
	45	TORX® screw TC 43 M8x16 NIC
PFS / PLS	20	TORX® screw TC 18 M4x8
	26	TORX® screw TC 28 M5x10
	30	TORX® screw TC 28 M5x10
	40	TORX® screw TC 43 M8x16
	45	TORX® screw TC 43 M8x16
PFN	26	TORX® screw TC 28 M5x10
	30	TORX® screw TC 28 M5x10
	40	TORX® screw TC 43 M8x16
PLN	40	TORX® screw TC 43 M8x16

see pg. XR-27, fig. 45, tab. 42

Stand 02.2020 / Edition 02.2020

Sämtliche Informationen und Daten basieren auf unseren aktuellen Kenntnissen wie auch Erfahrungen und befreien den Verarbeiter/Anwender nicht von eigenen umfassenden Prüfungen. Eine rechtlich verbindliche Zusicherung, auch im Hinblick auf Schutzrechte Dritter, ist damit nicht gegeben. Der Verkauf unserer Leistungen und Produkte unterliegt unseren Verkaufs- und Lieferbedingungen. Alle Angaben und Spezifikationen in diesem Katalog sind ohne Gewähr, (technische) Änderungen sowie Irrtum vorbehalten.

All information and data are based on our current knowledge as well as our experience and do not relieve processors/users of their own comprehensive tests. A legally binding assurance event with respect to third parties has not been achieved at present. The sale of our products and services is subject to our sales- and shipment policies. All information and specifications in this catalogue are without any guarantee, (technical) changes and errors excepted.



HA-CO GmbH
Johann-Roithner-Straße 131
A-4050 Traun
Phone +43 7229 23844
info@ha-co.at
www.ha-co.at



HA-CO Motion AG
Lidwil 10
CH-8852 Altendorf
Phone +41 55 225 40 50
info@ha-co.ch
www.ha-co.ch



HA-CO Carbon GmbH
Albert-Einstein-Straße 1
D-86757 Wallerstein
Phone +49 9081 8050740
info@ha-co.de
www.ha-co.de



HA-CO GmbH
Daimlerring 10
D-63839 Kleinwallstadt
Phone +49 6022 655810
info@ha-co.eu
www.ha-co.eu



**Profitieren Sie von den Synergien
unserer Gruppe.**

**HA-CO.group
Technik vom Spezialisten –fragen Sie
uns an!**

**Profitez des synergies
de notre groupe**

**HA-CO.group
La technologie du spécialiste –
demandez-nous!**